

По вопросам продаж и поддержки обращайтесь:

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89  
**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48

**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курган** (3522)50-90-47  
**Курск** (4712)77-13-04  
**Липецк** (4742)52-20-81  
**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Новосибирск** (383)227-86-73  
**Ноябрьск** (3496)41-32-12

**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Пермь** (342)205-81-47  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саранск** (8342)22-96-24  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35

**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35  
**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Улан-Удэ** (3012)59-97-51  
**Ульяновск** (8422)24-23-59  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(7172)727-132

**Киргизия** +996(312)96-26-47

сайт: [www.honeywell.nt-rt.ru](http://www.honeywell.nt-rt.ru) || эл. почта: [hwn@nt-rt.ru](mailto:hwn@nt-rt.ru)

## ДАТЧИКИ КАЧЕСТВА ВОЗДУХА

Технические характеристики на  
серию AQS-KAM



# AQS-KAM-xx, AQS 71-KAM-T, AQS-KAM-RH-V

## CO2 TEMPERATURE HUMIDITY TRANSMITTERS

### PRODUCT DATA & INSTALLATION INSTRUCTIONS

#### FEATURES

- Calibration-free technology
- Outstanding long-term stability
- Maintenance free
- universal mounting flange

#### SPECIFICATIO

**N** 24 Vac, ±20% (SELV)  
 Power supply 15...35 Vdc  
 0.6 W

Power consumption  
 Max. current consumption 0.35 A (0.3 sec / 15 sec)

#### Ambient Limits

Operating temperature -20...+60 °C (-4...+140 °F)  
 Transport and storage -20...+60 °C (-4...+140 °F)  
 Humidity 0...95% rh, non-condensing

#### Safety

Protection class III as per EN 60730-1  
 Protection standard Housing IP65 as per EN60529  
 Probe IP20

Housing material Flame retardant V0 as per UL94  
 Housing Dimensions plastic (PC)  
 Mounting see Fig. 1 on page 3  
 duct, M16x1,5 cable inlet

**CO<sub>2</sub> Sensor** Output  
 signal Output current  
 Output scaling

0...10 V  
 -1 mA < I<sub>L</sub> < 1 mA  
 0...10 V = 0...2000 ppm CO<sub>2</sub>  
 0...2000 ppm < ± (50 ppm

Accuracy (CO<sub>2</sub> at

25°C [77°F], 1013 mbar) +2% of measured value)

Temperature stability: typ. ± (1 + CO<sub>2</sub> conc. [ppm] / 1000) ppm / K (-20 ... +45 °C)

Response time Warm-up time  
 τ<sub>63</sub> < 100 sec at 3 m/s  
 < 5 min

**Temperature** Output  
 signal Output Current  
 Output scaling

0...10 V  
 -1 mA < I<sub>L</sub> < 1 mA  
 0...10 V = 0...50 °C

Accuracy (20 °C [68 °F]) ± 0.3 K

Response time τ<sub>63</sub> < 50 sec. at 3 m/s<sub>63</sub>

AQS-KAM-RH-V τ < 60 sec. at 3 m/s



#### GENERAL

The AQS Temperature Transmitters set new standards in CO<sub>2</sub> measurements in HVAC applications. Operation is based on the infrared principle. A calibration-free procedure compensates for aging of the infrared source and ensures outstanding long-term stability. The AQS provide 0...10 V analog output for CO<sub>2</sub> and temperature and are designed for HVAC applications (contact Honeywell for special applications). They are suitable for direct wiring with universal and voltage-controlled inputs. Additionally, the AQS-KAM-xx Temperature Transmitters feature a built-in passive temperature sensor. The AQS-KAM-RH-V Temperature Sensor is equipped with a relative humidity sensor. See also following table.

Table 1. List of devices

OS number	CO <sub>2</sub> + temp. output	temp. output (passive)	rel. humidity output
AQS-KAM-00	0...10 V	Pt1000	--
AQS-KAM-01		Ni1000	--
AQS-KAM-10		NTC10kΩ	--
AQS-KAM-20		NTC20kΩ	--
AQS 71-KAM-T		--	--
AQS-KAM-RH-V		--	0...10 V

**NOTE:** Avoid strong mechanical stress and improper handling. The cable gland and housing cover must be screwed tightly against gas penetration, to avoid incorrect measurements.

Table 2. Troubleshooting

Error	Possible cause	Remedies
Unrealistic results	Skewed installation	Air inlet and probe tip must be perpendicular to air flow.
	Low air velocity	Air velocity must be > 1 m/sec (200 ft/min).
	Housing not tight	Seal cover and gland tightly.
Long response time	Contamination of sensor or probe	Check sensor and probe for soiling and clean, as necessary.

**Passive Temp. Sensors (AQS-KAM-xx)**

Output 2-wire  
Wire resistance (typ.) 0.4 Ω (terminal-sensor)

**NTC10kΩ**

Nominal value Accuracy 10kΩ ±0.5% at 25 °C  
Response time (typ.) ±0.2 °C at 25 °C  
Sensitivity (typ.)  $t_{63} < 120$  s at 3 m/s air velocity  
-440 Ω / K at 25 °C (non-linear)

**NTC20kΩ**

Nominal value Accuracy 20kΩ ±0.5% at 25 °C  
Characteristic Response time (typ.) Sensitivity (typ.) ±0.2 °C at 25 °C  
NTC20kΩ (see EN0B-0476GE51)  
 $t_{63} < 120$  s at 3 m/s air velocity  
≈ -934.5 Ω / K at 25 °C (non-linear)

**Ni1000**

Nominal value Accuracy 1000 Ω at 0 °C  
Characteristic Sensitivity ±0.4 °C at 0 °C  
DIN 43760  
≈ 6.18 Ω / K

**Pt1000**

Nominal value 1000 Ω at 0 °C Accuracy (IEC751 Cl. B)  $0.3 + 0.005 \cdot |t|$  at 0 °C Characteristic see EN0B-0476GE51 Sensitivity (typ.) ≈ 3.85 Ω / K

**Relative humidity (AQS-KAM-RH-V)**

Working range 0...95% RH, non-condensing  
Output Accuracy 0...10 V prop. to 0...100% RH  
at 20 °C typ. ±2% RH, max. ±3% RH in range of 20...80% RH

**NOTE:** Temperature / relative humidity / CO<sub>2</sub> accuracy may differ, depending on various environmental conditions (e.g., air velocity or temperature difference between the air temperature and the ambient temperature).

**WIRING**

wiring run	maximum length
sensor to controller	200 m (660 ft)

**NOTE:** Installation of the sensor near high EMI-emitting devices may lead to faulty measurements. Use shielded wiring in areas with high EMI. Keep 15 cm (5.9") min. distance between sensor lines and 230 Vac power lines. Use two transformers: one for sensors and actuators and one for the controller.

**DIMENSIONS**


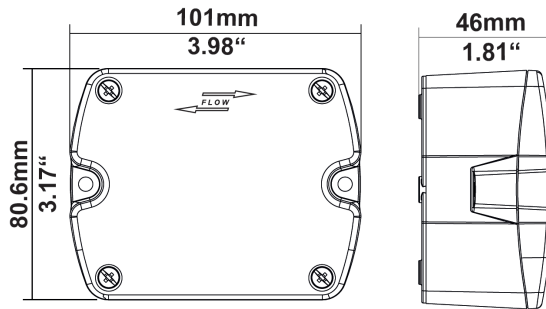


Fig. 1. Housing dimensions (mm)

**MOUNTING**

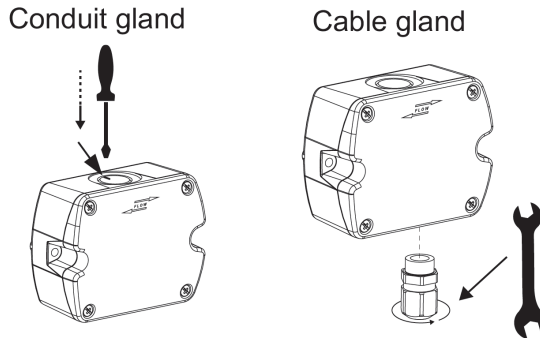

Screw with torque of 1.5 Nm for break-through. Recommended tightening torque: 3.5 Nm.

Fig. 2. Assembly of conduit / cable gland

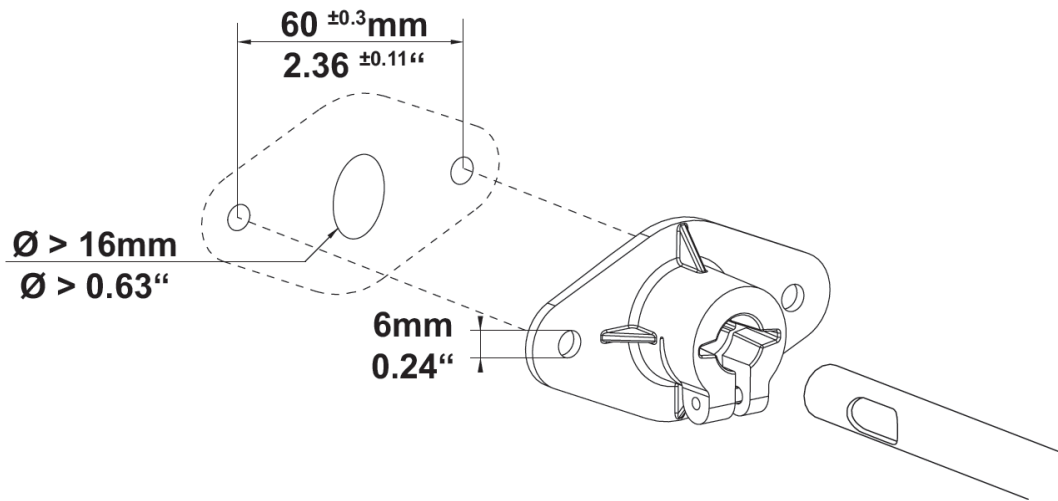


Fig 3. Flange mounting on duct

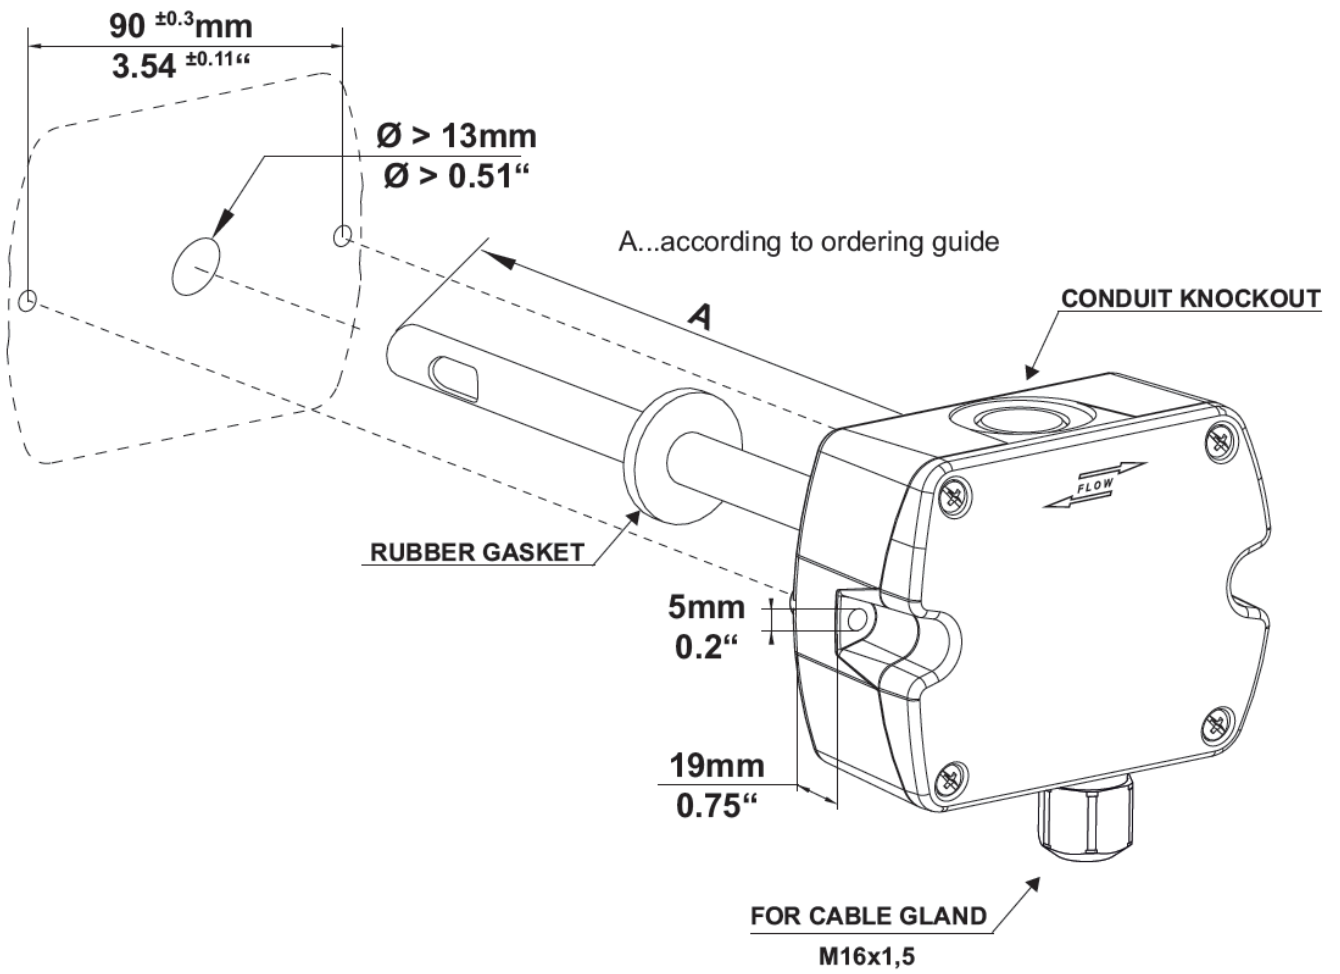


Fig. 4. Direct mounting on duct (probe length A = 200 mm)

По вопросам продаж и поддержки обращайтесь:

**Алматы** (7273)495-231  
**Ангарск** (3955)60-70-56  
**Архангельск** (8182)63-90-72  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Благовещенск** (4162)22-76-07  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Владикавказ** (8672)28-90-48  
**Владимир** (4922)49-43-18  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89  
**Иваново** (4932)77-34-06  
**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48

**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Коломна** (4966)23-41-49  
**Кострома** (4942)77-07-48  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курган** (3522)50-90-47  
**Курск** (4712)77-13-04  
**Липецк** (4742)52-20-81  
**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Новосибирск** (383)227-86-73  
**Ноябрьск**(3496)41-32-12

**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Пермь** (342)205-81-47  
**Петрозаводск** (8142)55-98-37  
**Псков** (8112)59-10-37  
**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саранск** (8342)22-96-24  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Сургут** (3462)77-98-35

**Сыктывкар** (8212)25-95-17  
**Тамбов** (4752)50-40-97  
**Тверь** (4822)63-31-35  
**Тольятти** (8482)63-91-07  
**Томск** (3822)98-41-53  
**Тула** (4872)33-79-87  
**Тюмень** (3452)66-21-18  
**Улан-Удэ** (3012)59-97-51  
**Ульяновск** (8422)24-23-59  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Чебоксары** (8352)28-53-07  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Чита** (3022)38-34-83  
**Якутск** (4112)23-90-97  
**Ярославль** (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(7172)727-132

**Киргизия** +996(312)96-26-47

сайт: [www.honeywell.nt-rt.ru](http://www.honeywell.nt-rt.ru) || эл. почта: [hwn@nt-rt.ru](mailto:hwn@nt-rt.ru)