

Technical Information

STR800 SmartLine Remote Diaphragm Seals Specification 34-ST-03-88



Introduction

Part of the SmartLine® family of products, the STR800 is a series of high performance pressure transmitters hydraulically matched and optimized with a complete set of remote diaphragm seals. Utilizing the same high performance sensor technology of the ST 800 product line Honeywell has optimized the mechanical and hydraulic designs in order to minimize the typical effects of temperature on remote seal systems.

Best in Class Transmitter Features:

- Accuracies up to 0.065% standard
- Automatic static pressure & temperature compensation
- Multiple local display capabilities
- External zero, span, & configuration capability
- Polarity insensitive electrical connections
- Comprehensive on-board diagnostic capabilities
- Integral Dual Seal design for highest safety based on ANSI/NFPA 70-202 and ANSI/ISA 12.27.0
- World class overpressure protection
- Full compliance to SIL 2/3 requirements.
- Modular design characteristics
- Available with 15 year warranty



Figure 1 – STR800 Remote Diaphragm Seal Unit

Remote Seal/Transmitter Span & Range Limits:

Model	URL "H ₂ O (mbar)	LRL "H ₂ O (mbar)	Max Span "H ₂ O (mbar)	Min Span "H ₂ O (mbar)
STR82D	400 (1000)	-400 (-1000)	400 (1000)	4.0 (10)
Model	psid (bar)	psid (bar)	psid (bar)	psid (bar)
STR83D	100 (7.0)	-100 (-7.0)	100 (7.0)	1 (0.07)
Model	psig (bar)	psig (bar)	psig (bar)	psig (bar)
STR84G	500 (35.0)	-14.7 (1.0)	500 (35.0)	5 (0.35)
STR87G	3000 (210)	-14.7 (1.0)	3000 (210)	30 (2.1)
Model	psia (bara)	psig (bara)	psig (bara)	psig (bara)
STR84A	500 (35)	0 (0)	500 (35)	5 (0.35)

Typical Diaphragm Seal applications

- High Process Temperatures
- Viscous or Suspended Solids
- Highly Corrosive Process Materials
- Sanitary Applications
- Applications with Hydrogen Permeation Possibilities
- Level Applications with Maintenance Intensive Wet Legs
- Applications requiring remote Transmitter Mounting
- Tank Applications with Density or Interface Measurements

Communications/Output Options:

- Honeywell Digitally Enhanced (DE)
- HART® (version 7.0)
- FOUNDATION™ Fieldbus

All transmitters are available with the above listed communications protocols.

По вопросам продаж и поддержки обращайтесь:
 Астана +7(7172)727-132, Волгоград (844)278-03-48, Воронеж (473)204-51-73, Екатеринбург (343)384-55-89, Казань (843)206-01-48,
 Краснодар (861)203-40-90, Красноярск (391)204-63-61, Москва (495)268-04-70, Нижний Новгород (831)429-08-12,
 Новосибирск (383)227-86-73, Ростов-на-Дону (863)308-18-15, Самара (846)206-03-16, Санкт-Петербург (812)309-46-40,
 Саратов (845)249-38-78, Уфа (347)229-48-12
 Единый адрес: hwn@nt-rt.ru
 www.honeywell.nt-rt.ru

Description

The SmartLine family of gauge pressure, differential pressure, and absolute pressure transmitters is designed around a high performance piezo-resistive sensor. This one sensor actually integrates multiple sensors linking process pressure measurement with on-board static pressure (DP Models) and temperature compensation measurements resulting in the best total performance available. This level of performance allows the ST 800 to replace virtually any competitive transmitter available today.

Unique Indication/Display Options

The ST 800 modular design accommodates a basic alphanumeric LCD display or a unique advanced graphics LCD display with many unparalleled features.

Basic Alphanumeric LCD Display Features

- Modular (may be added or removed in the field)
- 0, 90, 180, & 270 degree position adjustments
- Pa, KPa, MPa, KGcm², Torr, ATM, iH₂O, mH₂O, bar, mbar, inH₂O, inHG, FTH₂O, mmH₂O, mm HG, & psi measurement units
- 2 Lines 16 Characters (4.13H x 1.83W mm)
- Square root output indication (√)

Advanced Graphics LCD Display Features

- Modular (may be added or removed in the field)
- 0, 90, 180, & 270 degree position adjustments
- Standard and custom measurement units available.
- Up to eight display screens with 3 formats are possible (Large PV with Bar Graph or PV with Trend Graph)
- Configurable screen rotation timing
- Display Square Root capabilities may be set separately from the 4-20mA dc output signal
- Unique "Health Watch" indication provides instant visibility of diagnostics
- Multiple language capability. (EN, GE, FR, IT, SP, RU, TR, CN, JP)

Diagnostics

SmartLine transmitters all offer digitally accessible diagnostics which aid in providing advanced warning of possible failure events minimizing unplanned shutdowns, providing **lower overall operational costs**

Configuration Tools

Integral Three Button Configuration Option

Suitable for all electrical and environmental requirements, SmartLine offer the ability to configure the transmitter and display via three externally accessible buttons when either display option is selected. Zero/span capabilities are also optionally available via these buttons with or without selection of a display option.

Hand Held Configuration

SmartLine transmitters feature two-way communication and configuration capability between the operator and the transmitter. This is accomplished via Honeywell's field-rated Multiple Communication Configurator (MCT202).

The MCT202 is capable of field configuring DE and HART Devices and can also be ordered for use in intrinsically safe environments. All Honeywell transmitters are designed and tested for compliance with the offered communication protocols and are designed to operate with any properly validated hand held configuration device.

Personal Computer Configuration

Honeywell's SCT 3000 Configuration Toolkit provides an easy way to configure Digitally Enhanced (DE) instruments using a personal computer as the configuration interface. Field Device Manager (FDM) Software and FDM Express are also available for managing HART & Fieldbus device configurations.

System Integration

- SmartLine communications protocols all meet the most current published standards for HART/DE/Fieldbus.
- Integration with Honeywell's Experion PKS offers the following unique advantages.
 - Transmitter messaging
 - Maintenance mode indication
 - Tamper reporting
 - FDM Plant Area Views with Health summaries
 - All ST 800 units are Experion tested to provide the highest level of compatibility assurance

Modular Design

To help contain maintenance & inventory costs, all STR800 transmitters are modular in design supporting the user's ability to replace or add indicators, terminal connections or electronic modules without affecting overall performance or approval body certifications

Modular Features

- Exchange/replace electronics/comms modules*
- Add or remove integral indicators*
- Add or remove lightning protection (terminal connection)*

* Field replaceable in all electrical environments (including IS) except flameproof without violating agency approvals.

With no performance effects, Honeywell's unique modularity results in **lower inventory needs and lower overall operating costs**.

Performance Specifications¹

Reference Accuracy² (conformance to +/-3 Sigma)

Model	URL	LRL	Min Span	Maximum Turndown Ratio	Reference Accuracy ¹ (% Span)
STR82D	400 in H ₂ O/1000mbar	-400 in H ₂ O/-1000mbar	4 in H ₂ O/10mbar	100:1	0.065
STR83D	100 psid/7.0 bar	-100 psi/-7.0bar	1 in psi/.07bar	100:1	0.065
STR84G	500 psi/35 bar	-14.7/-1.0 bar	5 psi/0.35 bar	100:1	0.065
STR87G	3000 psi/210 bar	-14.7 psi/-1.0 bar	30 psi/2.1 bar	100:1	0.065
STR84A	500 psia/35 bara	0 psia/0 bara	5 psia/0.35 bara	100:1	0.065

Zero and span may be set anywhere within the listed (URL/LRL) range limits

Accuracy at Specified Span, Temperature and Static Pressure: (conformance to +/-3 Sigma)

Model	URL	Accuracy ¹ (% of Span)				Temperature Effect ³ (% Span/50°F)		
		Turn down greater than	A	B	C (see URL Units)	D	E	F
STR82D	400 in H ₂ O (1000mbar)	8:1	0.015	0.050	50 (125)	0.175	1.000	200 (500)
STR83D	100 psi (7.0 bar)	3.33:1	0.015	0.050	30 (2.1)	0.025	0.280	30 (2.1)
STR84G	500 psig (35 bar)	25:1	0.015	0.050	20 (1.4)			
STR87G	3000 psi (210 bar)	10:1	0.015	0.050	300 (21)			
STR84A	500 psia (35 bara)	25:1	0.015	0.050	20 (1.4)			
Turn Down Effect					Temp Effect			
$\pm \left[A + B \left(\frac{C}{\text{Span}} \right) \right]$ % Span					$\pm \left[D + E \left(\frac{F}{\text{Span}} \right) \right]$ % Span per 28°C (50°F)			

Total Performance (% of Span):

$$\text{Total Performance} = \pm \sqrt{(\text{Accuracy})^2 + (\text{Temp Effect})^2}$$

Total Performance Examples: (5:1 Turndown, up to 50 °F shift)

STR82D @ 80°H₂O: 2.68% of span

STR83D @ 20 psid: 0.45% of span

Typical Calibration Frequency:

Calibration verification is recommended every four (4) years

Notes:

1. Terminal Based Accuracy – Includes combined effects of linearity, hysteresis, and repeatability. Analog output adds 0.005% of span.
2. For zero based spans and reference conditions of 25°C (77°F), 0 psig static pressure, 10 to 55% R.H, and 316 Stainless Steel barrier diaphragms
3. Specification applies to transmitter with 2 seals. Apply a 1.5 factor for temperature effect for capillary lengths greater than 10 feet.

Operating Conditions – All Models

Parameter	Reference Condition (at zero static)		Rated Condition		Operative Limits		Transportation and Storage																	
	°C	°F	°C	°F	°C	°F	°C	°F																
Ambient Temperature ¹	25±1	77±2	-	-	-	-	-55 to 90	-67 to 194																
Humidity %RH	10 to 55		0 to 100		0 to 100		0 to 100																	
Vacuum Region, Minimum Pressure mmHg absolute	Atmospheric (See Figure 4 for vacuum limitation)																							
Supply Voltage, Current, and Load Resistance	10.8 to 42.4 Vdc at terminals (IS versions limited to 30 Vdc) 0 to 1,440 ohms (as shown in Figure 2)																							
Maximum Allowable Working Pressure (MAWP) ⁴ (ST 800 products are rated to Maximum Allowable Working Pressure. MAWP depends on Approval Agency and transmitter materials of construction.)	MAWP is minimum of Body Rating or Seal Rating (See Model Selection Guide for Seal MAWP) <table border="0"> <thead> <tr> <th>Body</th> <th>MAWP</th> </tr> </thead> <tbody> <tr> <td>STR82D</td> <td>2,500 psig (172 bar) Bolted Process Heads</td> </tr> <tr> <td>STR83D</td> <td>2,500 psig (172 bar) Bolted Process Heads</td> </tr> <tr> <td>STR82D</td> <td>1,450 psig (100 bar) All Welded Process</td> </tr> <tr> <td>STR83D</td> <td>1,450 psig (100 bar) All Welded Process</td> </tr> <tr> <td>STR84G</td> <td>500 psig (35 bar)</td> </tr> <tr> <td>STR87G</td> <td>3,000 psig (207 bar)</td> </tr> <tr> <td>STR84A</td> <td>500 psia (35 bara)</td> </tr> </tbody> </table>								Body	MAWP	STR82D	2,500 psig (172 bar) Bolted Process Heads	STR83D	2,500 psig (172 bar) Bolted Process Heads	STR82D	1,450 psig (100 bar) All Welded Process	STR83D	1,450 psig (100 bar) All Welded Process	STR84G	500 psig (35 bar)	STR87G	3,000 psig (207 bar)	STR84A	500 psia (35 bara)
Body	MAWP																							
STR82D	2,500 psig (172 bar) Bolted Process Heads																							
STR83D	2,500 psig (172 bar) Bolted Process Heads																							
STR82D	1,450 psig (100 bar) All Welded Process																							
STR83D	1,450 psig (100 bar) All Welded Process																							
STR84G	500 psig (35 bar)																							
STR87G	3,000 psig (207 bar)																							
STR84A	500 psia (35 bara)																							

¹ Ambient Temperature Limit is a function of Process Interface Temperature and fill fluid. (See [Figure 23](#) & [Figure 4](#))

LCD Display operating temperature -20°C to +70°C . Storage temperature -30°C to 80°C

⁴ Consult factory for MAWP of ST 800 transmitters with CRN approval.

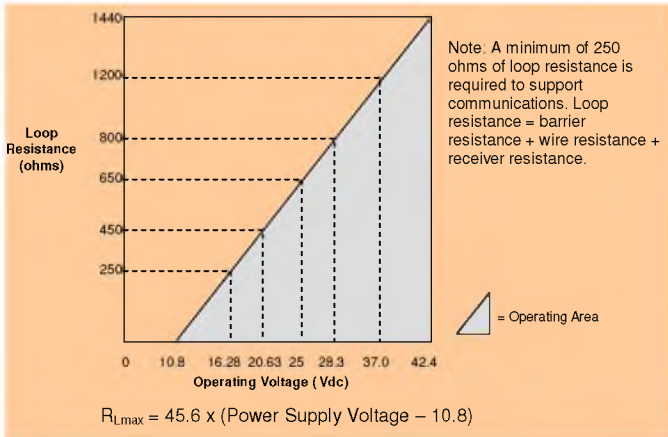


Figure 2 - Supply voltage and loop resistance

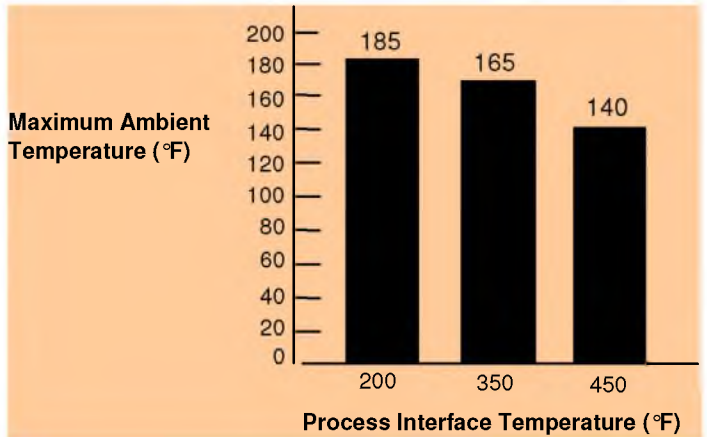


Figure 3 - Ambient temperature Limits

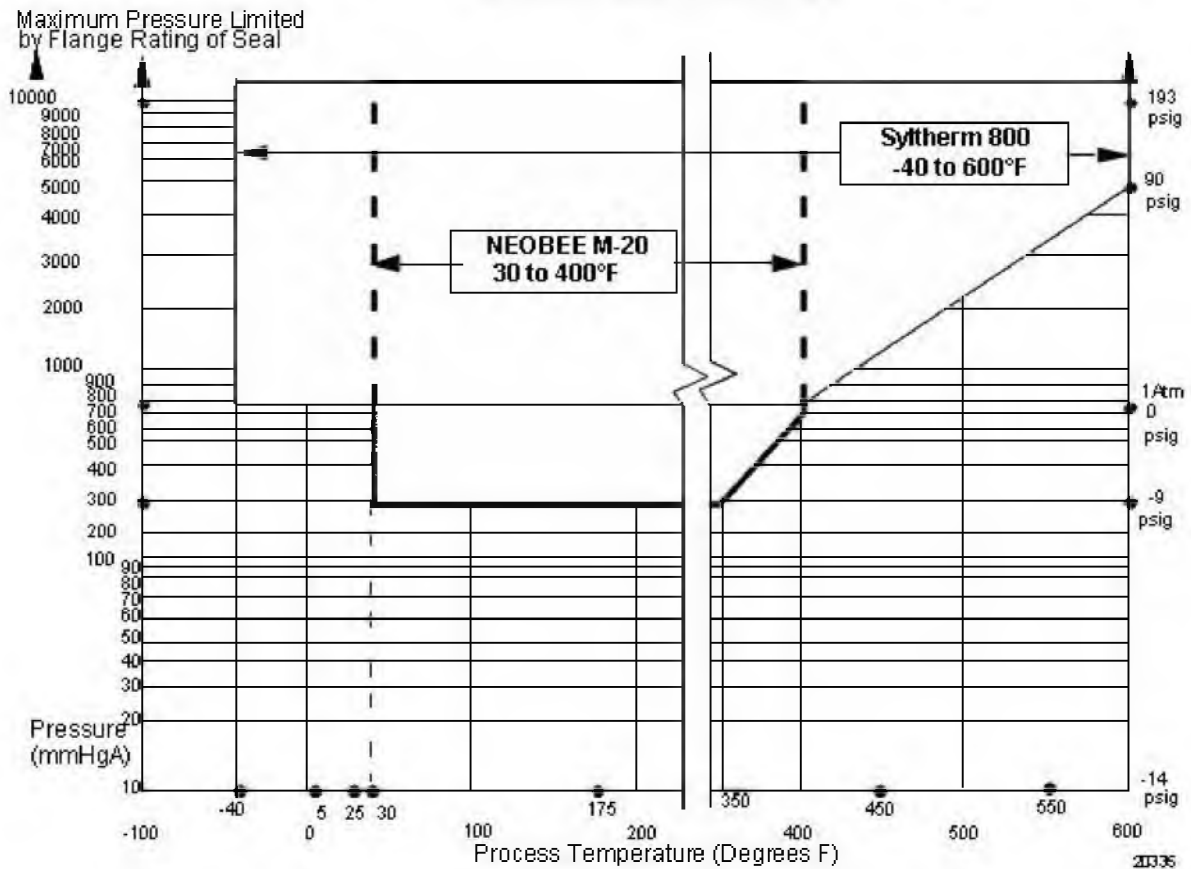
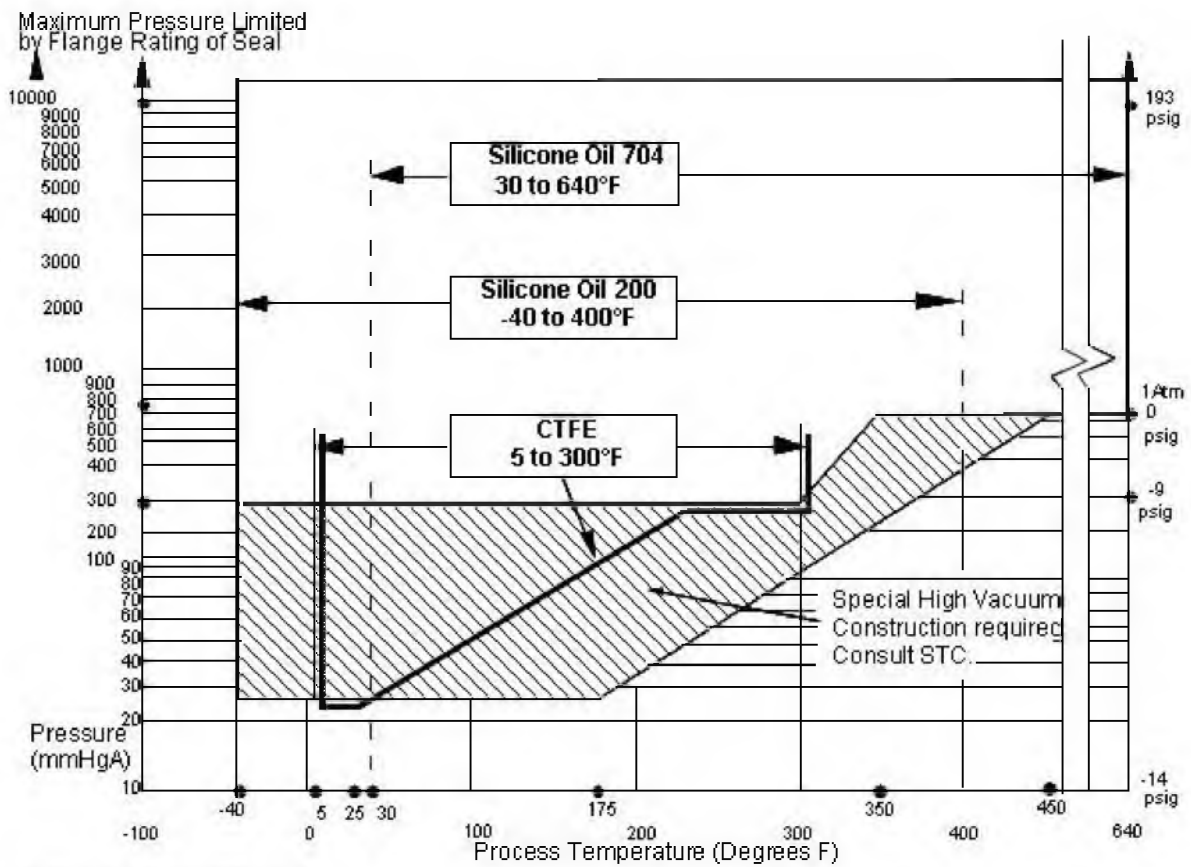


Figure 4 - STR800 Remote Seals operable limits for pressure vs. temperature

Performance Under Rated Conditions – All Models

Parameter	Description									
Analog Output Digital Communications:	Two-wire, 4 to 20 mA (HART & DE Transmitters only) Honeywell DE, HART 7 protocol or FOUNDATION Fieldbus ITK 6.0.1 compliant All transmitters, irrespective of protocol have polarity insensitive connection.									
Output Failure Modes	<table> <thead> <tr> <th>Compliance:</th> <th>Honeywell Standard:</th> <th>NAMUR NE 43</th> </tr> </thead> <tbody> <tr> <td>Normal Limits:</td> <td>3.8 – 20.8 mA</td> <td>3.8 – 20.5 mA</td> </tr> <tr> <td>Failure Mode:</td> <td>≤ 3.6 mA and ≥ 21.0 mA</td> <td>≤ 3.6 mA and ≥ 21.0 mA</td> </tr> </tbody> </table>	Compliance:	Honeywell Standard:	NAMUR NE 43	Normal Limits:	3.8 – 20.8 mA	3.8 – 20.5 mA	Failure Mode:	≤ 3.6 mA and ≥ 21.0 mA	≤ 3.6 mA and ≥ 21.0 mA
Compliance:	Honeywell Standard:	NAMUR NE 43								
Normal Limits:	3.8 – 20.8 mA	3.8 – 20.5 mA								
Failure Mode:	≤ 3.6 mA and ≥ 21.0 mA	≤ 3.6 mA and ≥ 21.0 mA								
Supply Voltage Effect	0.005% span per volt.									
Transmitter Turn on Time (includes power up & test algorithms)	HART or DE: 2.5 sec. Foundation Fieldbus: Host dependant									
Damping Time Constant	HART: Adjustable from 0 to 32 seconds in 0.1 increments. Default: 0.50 seconds DE: Discrete values 0, .16, .32, .48, 1, 2, 4, 8, 16, 32 seconds. Default: 0.48 seconds									
Electromagnetic Compatibility	IEC 61326-3-1									
Lightning Protection Option	<table> <tbody> <tr> <td>Leakage Current:</td> <td>10uA max @ 42.4VDC 93C</td> <td></td> </tr> <tr> <td>Impulse rating:</td> <td>8/20uS 5000A (>10 strikes)</td> <td>10000A (1 strike min.)</td> </tr> <tr> <td></td> <td>10/1000uS 200A (> 300 strikes)</td> <td></td> </tr> </tbody> </table>	Leakage Current:	10uA max @ 42.4VDC 93C		Impulse rating:	8/20uS 5000A (>10 strikes)	10000A (1 strike min.)		10/1000uS 200A (> 300 strikes)	
Leakage Current:	10uA max @ 42.4VDC 93C									
Impulse rating:	8/20uS 5000A (>10 strikes)	10000A (1 strike min.)								
	10/1000uS 200A (> 300 strikes)									

Materials Specifications (see Model Selection Guide for availability/restrictions with various models)

Parameter	Description										
Process Interface	See Model Selection Guide for Material Options for desired seal type.										
Seal Barrier Diaphragm	316L Stainless Steel, Monel®, Hastelloy® C, Tantalum										
Seal Gasket Materials	Klinger C-4401 (non-asbestos), Grafoil®, Teflon®, Gylon 3510®										
Mounting Bracket	Carbon Steel (Zinc-Chromate plated) or 304 Stainless Steel or 316 Stainless Steel										
Fill Fluid (Meter Body)	<table> <tbody> <tr> <td>Silicone Oil 200</td> <td>S.G. @ 25 °C = 0.94</td> </tr> <tr> <td>CTFE (Chlorotrifluoroethylene)</td> <td>S.G. @ 25 °C = 1.89</td> </tr> </tbody> </table>	Silicone Oil 200	S.G. @ 25 °C = 0.94	CTFE (Chlorotrifluoroethylene)	S.G. @ 25 °C = 1.89						
Silicone Oil 200	S.G. @ 25 °C = 0.94										
CTFE (Chlorotrifluoroethylene)	S.G. @ 25 °C = 1.89										
Fill Fluid (Secondary)	<table> <tbody> <tr> <td>Silicone Oil 200</td> <td>S.G. @ 25 °C = 0.94</td> </tr> <tr> <td>CTFE (Chlorotrifluoroethylene)</td> <td>S.G. @ 25 °C = 1.89</td> </tr> <tr> <td>Silicone Oil 704</td> <td>S.G. @ 25 °C = 1.07</td> </tr> <tr> <td>Syltherm 800®</td> <td>S.G. @ 25 °C = 0.90</td> </tr> <tr> <td>NEOBEE M-20®</td> <td>S.G. @ 25 °C = 0.93</td> </tr> </tbody> </table>	Silicone Oil 200	S.G. @ 25 °C = 0.94	CTFE (Chlorotrifluoroethylene)	S.G. @ 25 °C = 1.89	Silicone Oil 704	S.G. @ 25 °C = 1.07	Syltherm 800®	S.G. @ 25 °C = 0.90	NEOBEE M-20®	S.G. @ 25 °C = 0.93
Silicone Oil 200	S.G. @ 25 °C = 0.94										
CTFE (Chlorotrifluoroethylene)	S.G. @ 25 °C = 1.89										
Silicone Oil 704	S.G. @ 25 °C = 1.07										
Syltherm 800®	S.G. @ 25 °C = 0.90										
NEOBEE M-20®	S.G. @ 25 °C = 0.93										
Electronic Housing	Pure Polyester Powder Coated Low Copper (<0.4%)-Aluminum. Meets NEMA 4X, IP66, & P67. All stainless steel housing is optional.										
Capillary Tubing	<p>Material: Armored Stainless Steel or PVC Coated Armored Stainless Steel.</p> <p>Length: 5, 10, 15, 20, 25, and 35 feet (1.5, 3, 4.6, 6.1, 7.5, and 10.7 meters). A 2 inch (51 millimeter) S.S. close-coupled nipple is also available. See Model Selection Guide. Refer to Figure 5 for guide to maximum capillary length vs. diaphragm diameter.</p>										
Wiring	Accepts up to 16 AWG (1.5 mm diameter)										
Mounting	See Figure 6										
Dimensions	Transmitter: See Figure 7 and Figure 8 . Seal: See Figure 9 through Figure 17										
Net Weight	Transmitter: 8.3 pounds (3.8 Kg). With Aluminum Housing. Total weight is dependent on seal										

NOTE: Pressure transmitters that are part of safety equipment for the protection of piping (systems) or vessel(s) from exceeding allowable pressure limits, (equipment with safety functions in accordance with Pressure Equipment Directive 97/23/EC article 1, 2.1.3), require separate examination.

Minimum recommended span for STR82D and STR83D Transmitter with two Remote Seals

Diaphragm Size	Capillary						Capillary Length Maximum
	5"	10"	15"	20"	30"	35"	
2.4	200 iwc						5'
2.9	100 iwc	125 iwc	150 iwc	175 iwc			20'
3.5	16 iwc	20 iwc	24 iwc	28 iwc	36 iwc	40 iwc	35'
4.1	12 iwc	15 iwc	18 iwc	21 iwc	27 iwc	30 iwc	35'


Minimum recommended span for STR82D and STR83D Transmitter with one Remote Seal

Diaphragm Size	Direct Mount	Capillary						Capillary Length
		5"	10"	15"	20"	30"	35"	
2.4	20 psig	30 psig						5'
2.9	10 psig	15 psig	20 psig	25 psig	30 psig			20'
3.5	50 iwc	80 iwc	100 iwc	120 iwc	140 iwc	180 iwc	200 iwc	35'
4.1	40 iwc	60 iwc	80 iwc	100 iwc	120 iwc	160 iwc	180 iwc	35'

Minimum recommended span for STR84G, STR84A and STR87G Transmitter with one Remote Seal

Diaphragm Size	Direct Mount	Capillary						Capillary Length
		5"	10"	15"	20"	30"	35"	
2.0	25 psig	30 psig	40 psig					15'
2.4	10 psig	15 psig	20 psig	25 psig	30 psig	40 psig	50 psig	35'
2.9	8 psig	9 psig	10 psig	11 psig	12 psig	14 psig	15 psig	35'
3.5	5 psig	5 psig	5 psig	120 psig	140 psig	180 psig	200 psig	35'
4.1	5 psig	5 psig	5 psig	100 psig	120 psig	160 psig	180 psig	35'



Figure 5 – Typical Maximum capillary length and diaphragm size chart

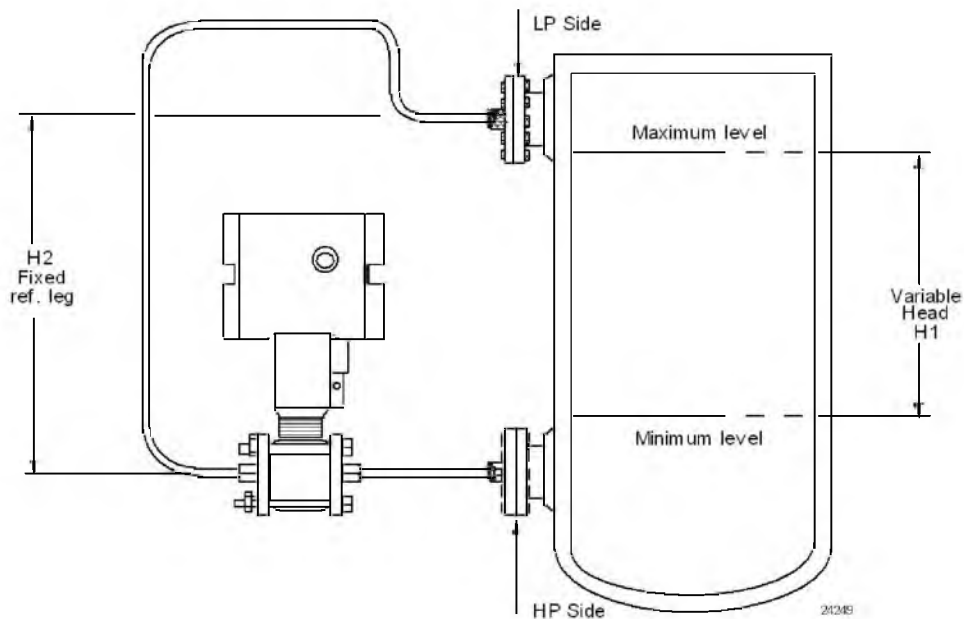

NOTE: Lower flange seal should not be mounted over 22 feet below or above the transmitter for silicone fill fluid (11 feet for CTFE fill fluid) with tank at one atmosphere. The combination of tank vacuum and high pressure capillary head effect should not exceed 9 psi vacuum (300 mmHg absolute).

Figure 6 - STR800 transmitter with remote diaphragm seals shown mounted on a tank

Reference Dimensions Horizontal Mounting

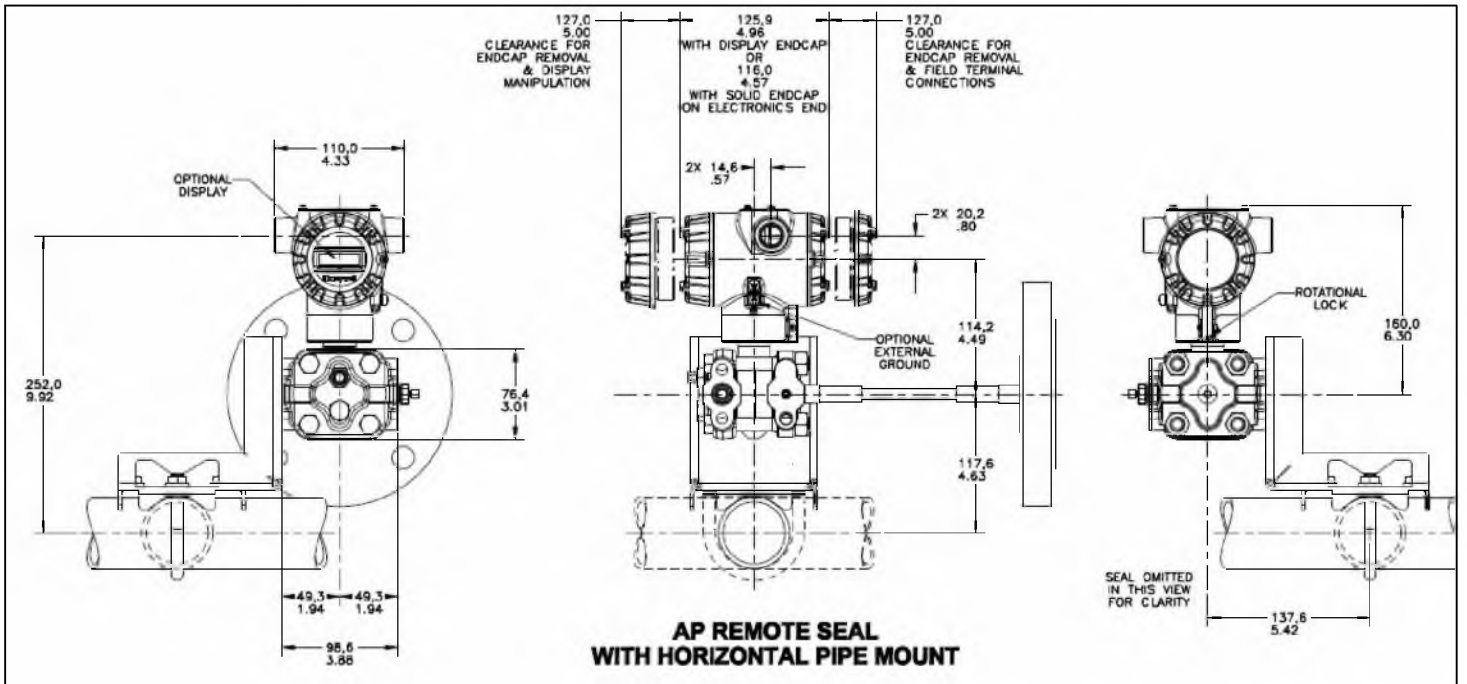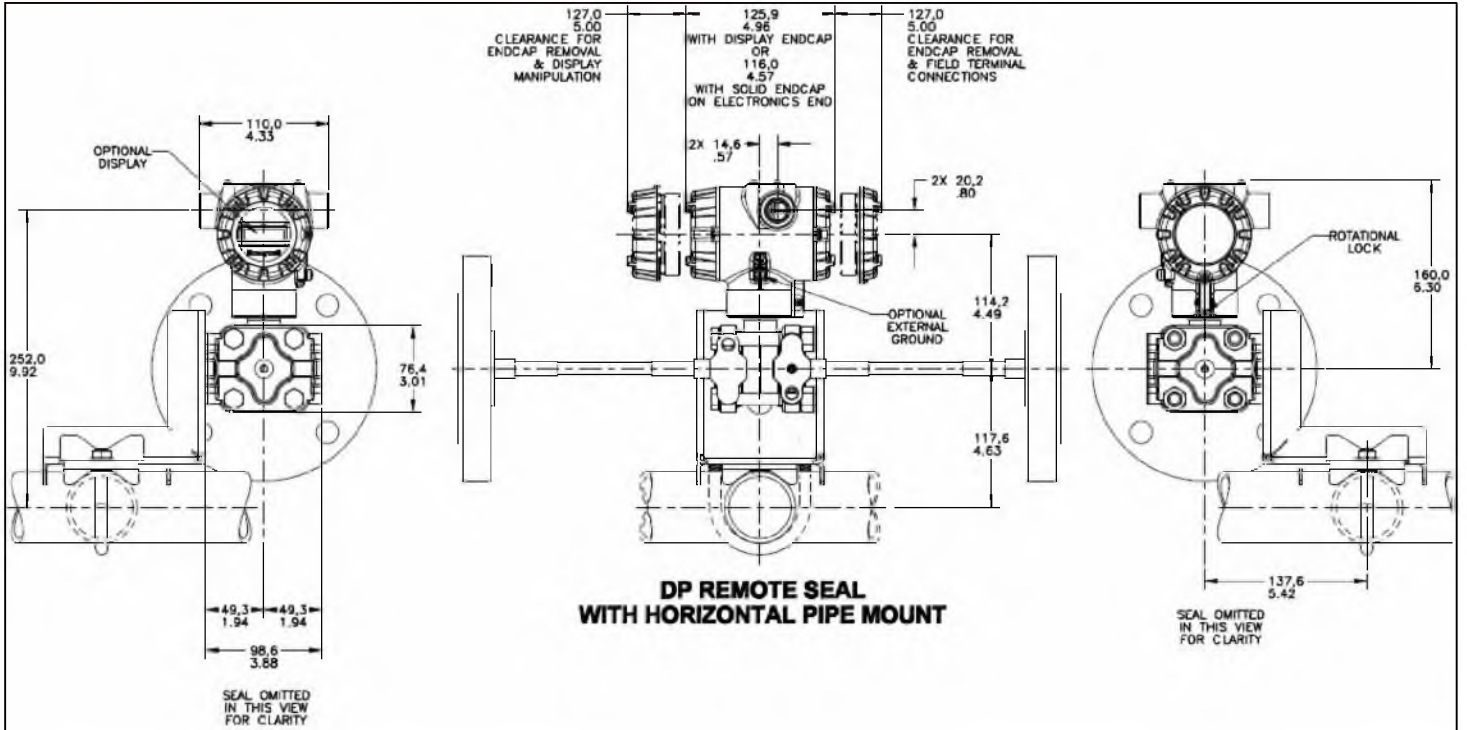

Reference Dimensions Horizontal Mounting (cont'd)


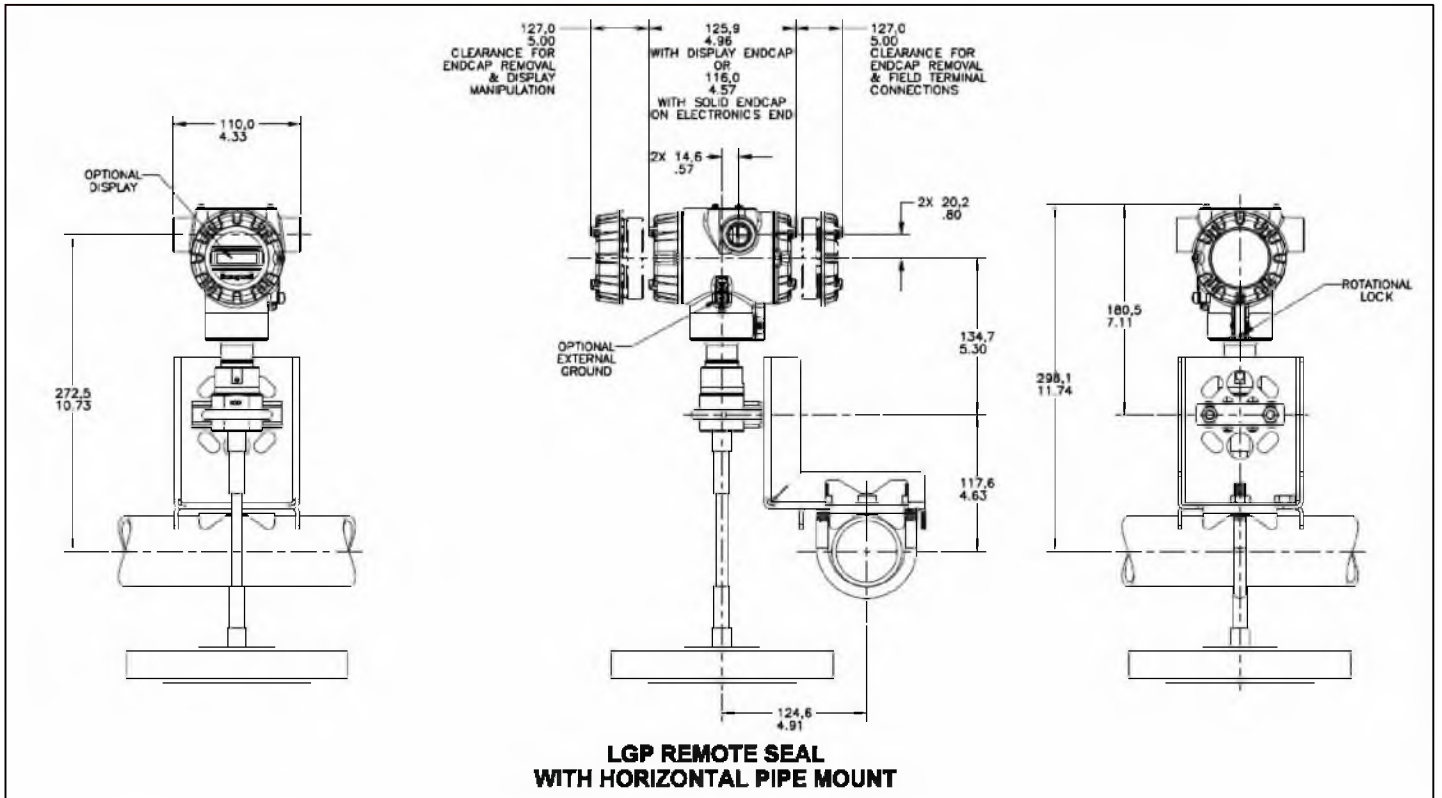


Figure 7 — Approximate horizontal mounting dimensions for Remote Seal Transmitter

Reference Dimensions Vertical Mounting

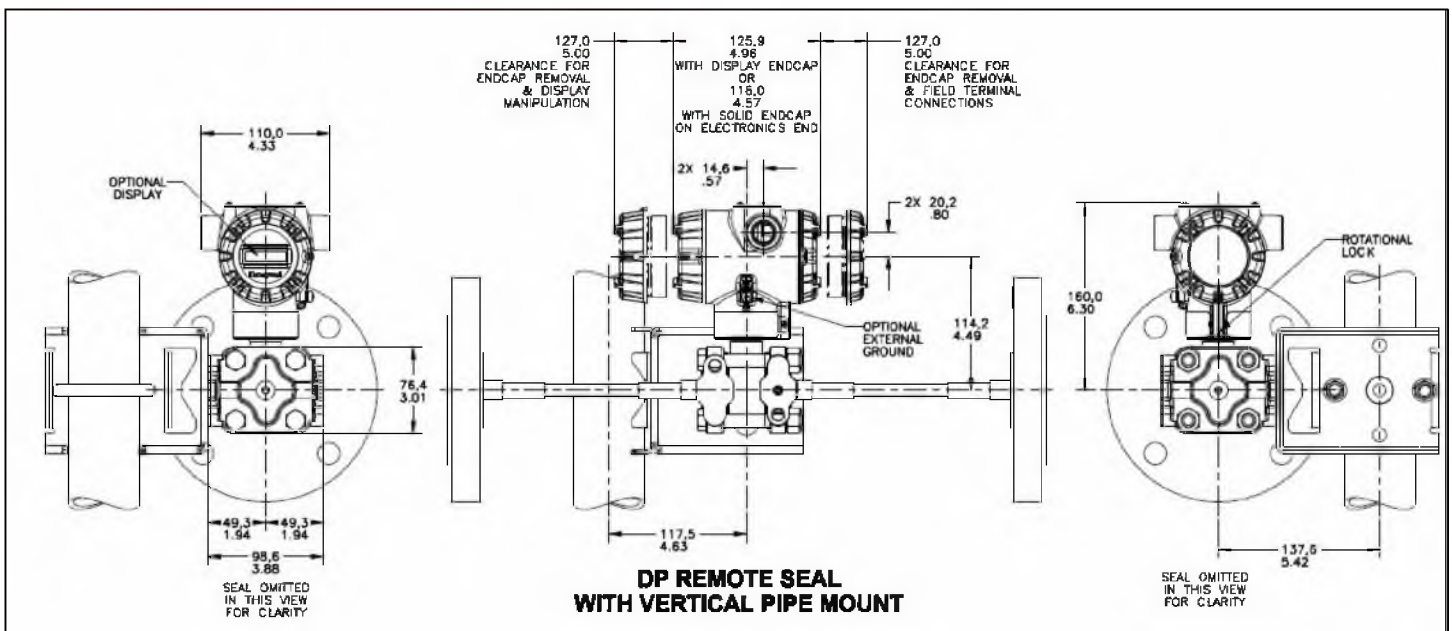

Reference Dimensions Vertical Mounting (cont'd)



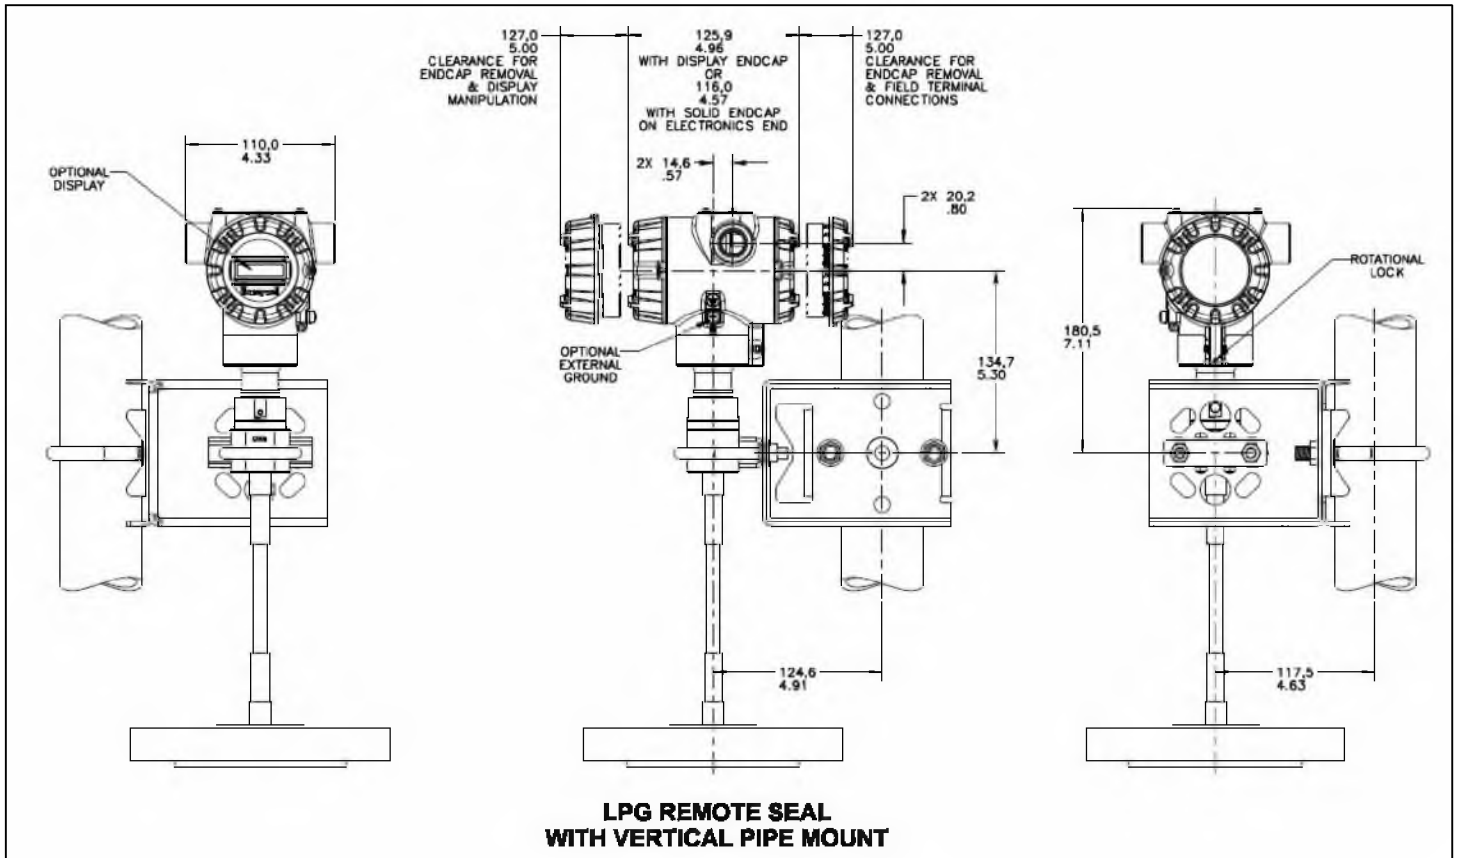


Figure 8 — Approximate vertical mounting dimensions for Remote Seal Transmitter

Reference Dimensions (cont'd)


Flush Flanged Seal Dimensions

Type	ANSI/DIN Rating	Flange Material	Wetted Materials		Construction See figura	↔			
			Diaphragm	Body		A	B		
Flush Flanged Seal	3" Class 150#	CS	SS	SS	D	7.5	1.37		
			Hastelloy C	SS	C				
			Hastelloy C	Hastelloy C	D				
			Monel	Monel	D				
		Tantalum	SS	C					
		SS	SS	N/A	B			7.90	0.94
			Hastelloy C	SS	A				
			Hastelloy C	Hastelloy C	D				
	Monel		Monel	D					
	Tantalum	SS	C						
	3" Class 300#	CS	SS	SS	D	8.25	1.58		
			Hastelloy C	SS	C				
			Hastelloy C	Hastelloy C	D				
			Monel	Monel	D				
		Tantalum	SS	C					
		SS	SS	N/A	B			8.25	1.12
			Hastelloy C	SS	A				
			Hastelloy C	Hastelloy C	D				
	Monel		Monel	D					
	Tantalum	SS	C						
3" Class 600#	CS	SS	SS	D	8.25	1.75			
		Hastelloy C	SS	C					
		Hastelloy C	Hastelloy C	D					
		Monel	Monel	D					
	Tantalum	SS	C						
	SS	SS	N/A	B			8.25	1.5	
		Hastelloy C	SS	A					
		Hastelloy C	Hastelloy C	D					
Monel		Monel	D						
Tantalum	SS	C							
DN80-PN40	CS	SS	SS	D	7.87	1.32			
		Hastelloy C	SS	C					
		Hastelloy C	Hastelloy C	D					
		Monel	Monel	D					
	Tantalum	SS	C						
	SS	SS	N/A	B			7.87	0.94	
		Hastelloy C	SS	A					
		Hastelloy C	Hastelloy C	D					
Monel		Monel	D						
Tantalum	SS	C							

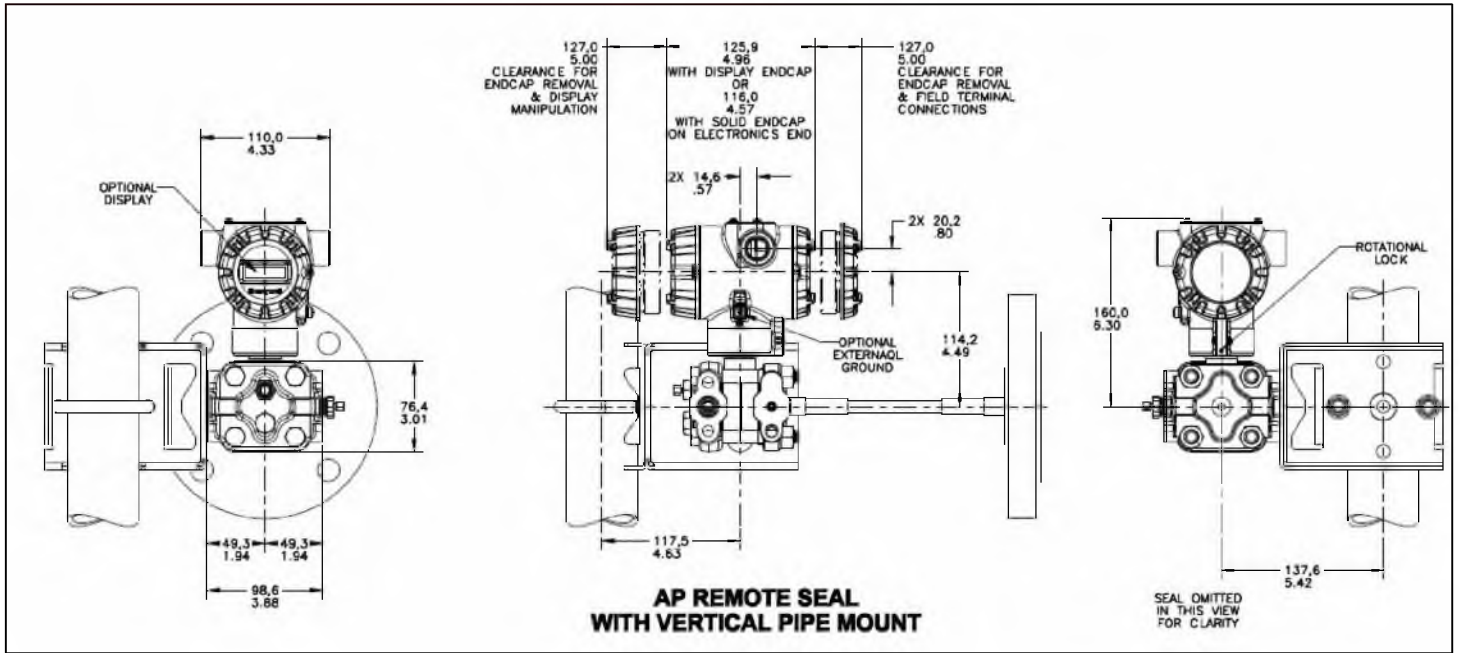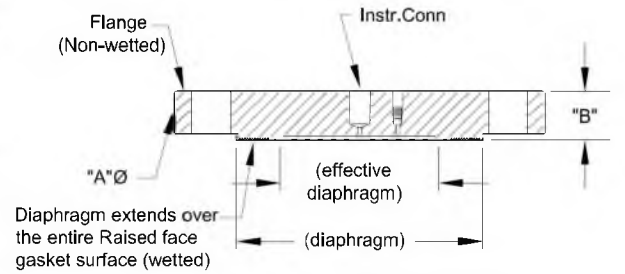


Configuration "HS"

Figure A

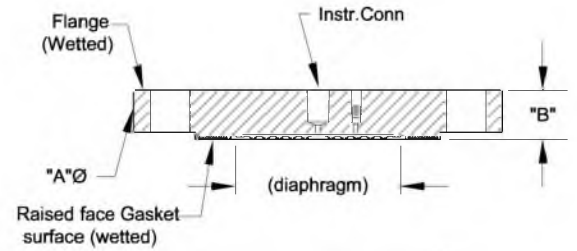


Configuration "HT"

Figure B

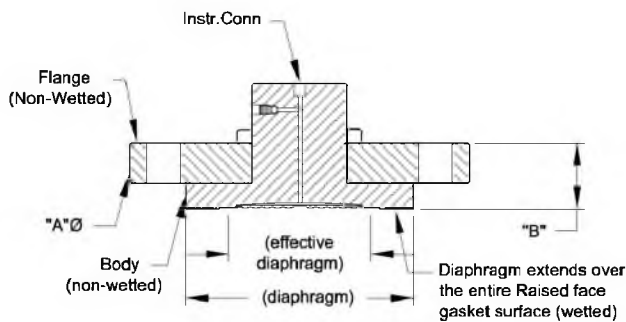

Configuration "IS"

Figure C

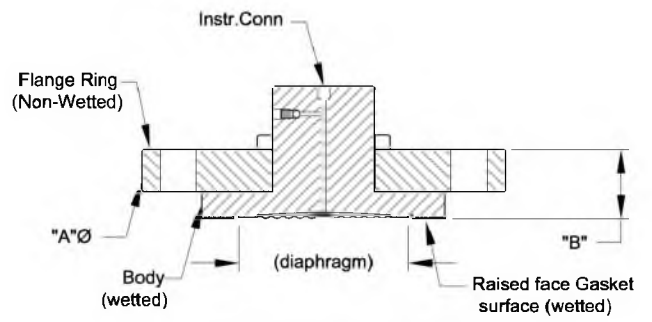

Configuration "IT"

Figure D


Figure 9— Seal Dimensions (Flush Flanged)

Reference Dimensions (cont'd)


Flush Flanged Seal with Lower

Type	ANSI/DIN Rating	Size	Dimension	2.4" Diaph. Dia. (in.)	2.9" Diaph. Dia. (in.)	4.1" Diaph. Dia. (in.)
Flush Flanged Seal with Lower	Class 150#	1/2"	A	3.50	4.00	5.25
			B0	1.72	1.72	1.84
			B1	1.72	1.72	1.84
		B2	2.22	2.22	2.34	
		1"	B0	4.25	4.00	5.25
			B1	1.12	1.72	1.84
			B2	1.62	1.72	1.84
		1-1/2"	B0	5.00	5.00	5.25
			B1	2.50	2.50	1.78
			B2	3.00	3.00	2.12
		2"	A	3.50	3.40	2.12
			B0	6.00	6.00	6.00
			B1	2.50	2.50	2.12
		B2	3.00	3.00	2.12	
		3"	A	3.50	3.40	2.12
	B0		7.50	7.50	7.50	
	B1		2.88	2.88	2.80	
	B2	2.88	2.88	3.00		
	Class 300#	1"	A	3.50	3.40	2.12
			B0	4.88	4.00	5.25
			B1	2.50	1.72	1.88
		B2	3.00	1.72	2.12	
		1-1/2"	A	3.50	2.22	2.12
			B0	6.12	6.12	5.25
B1			2.50	2.50	2.12	
B2		3.00	3.00	2.12		
2"		A	3.50	3.40	2.12	
		B0	8.50	8.50	6.50	
		B1	2.50	2.50	2.70	
B2		3.00	3.00	3.00		
3"	A	3.50	3.40	3.50		
	B0	8.25	8.25	8.25		
	B1	3.48	3.48	3.20		
B2	3.48	3.48	3.60			
Class 600#	1"	A	4.10	4.00	4.00	
		B0	4.88	4.50	5.25	
		B1	2.50	2.15	2.26	
	B2	3.00	2.15	2.26		
	1-1/2"	A	3.50	2.40	2.50	
		B0	6.12	6.12	5.25	
		B1	2.50	1.53	2.50	
	B2	3.00	2.09	3.00		
	2"	A	3.50	2.49	3.50	
		B0	8.50	8.50	6.50	
		B1	3.10	3.10	3.30	
	B2	3.60	3.60	3.60		
3"	A	4.10	4.00	4.10		
	B0	8.25	8.25	6.25		
	B1	3.48	3.48	3.20		
B2	3.48	3.48	3.60			

- B0 Without Flush
- B1 B Dimension with 1/4 NPT Flushing Connection
- B2 B dimension with 1/2 NPT Flushing Connection

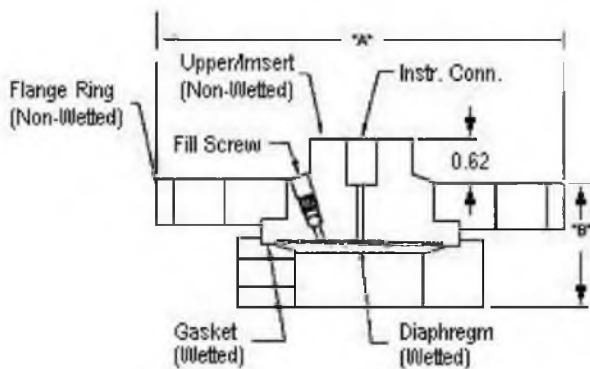

Flush Flanged Seal with Lower

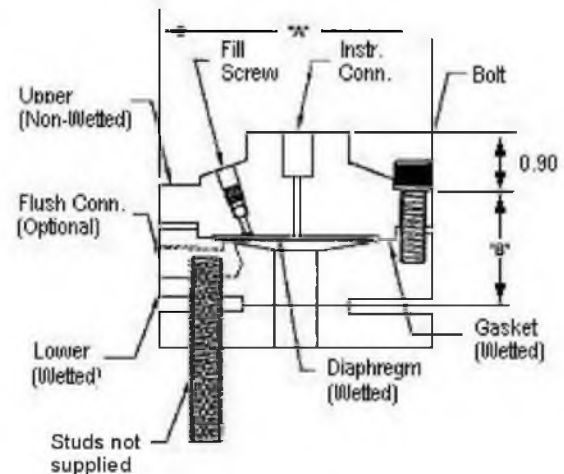

Flush Flanged Seal with Lower
 Nte: 0.90 dimension is 0.70 for 4.1" Dia Diaphragm

Figure 10 — Seal Dimension (Flush Flanged)

Reference Dimensions (cont'd)

Flanged Seal with Extended Diaphragm

Type	ANSI/DIN Rating	Dimension	2.8" Diaphragm Dia. (in.)	3.5" Diaphragm Dia. (in.)
Flanged Seal with Extended Diaphragm	3" Class 150#	A	7.50	-
		B	0.94	-
		C	2.80	-
	3" Class 300#	A	8.25	-
		B	1.12	-
		C	2.80	-
	DIN DN80-PN40	A	7.87	-
		B	0.94	-
		C	2.80	-
	4" Class 150#	A	-	9.00
		B	-	0.94
		C	-	3.70
4" Class 300#	A	-	10.00	
	B	-	1.25	
	C	-	3.70	
DIN DN80-PN40	A	-	9.25	
	B	-	0.94	
	C	-	3.70	

Designed to meet with schedule 40 pipe

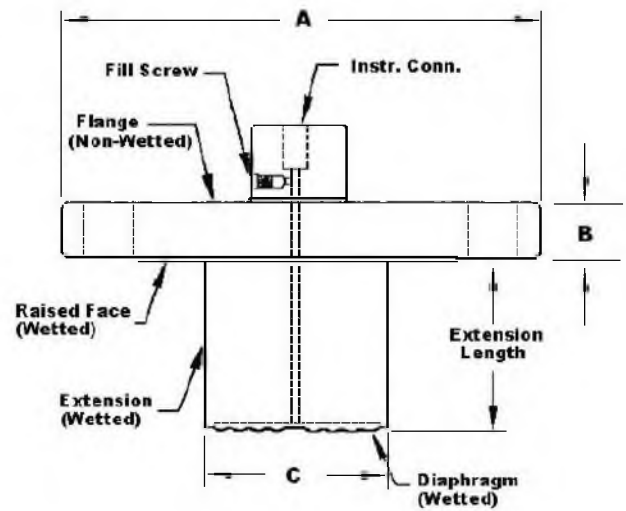


Figure 11 — Seal Dimensions (Extended Diaphragms)

Pancake Seal

Type	ANSI/DIN	Dimension	3.5" Diaph. (in.)
Pancake Seal	Class 150#, 300#, 600# DN80-PN40	A	5.00
		B	1.08

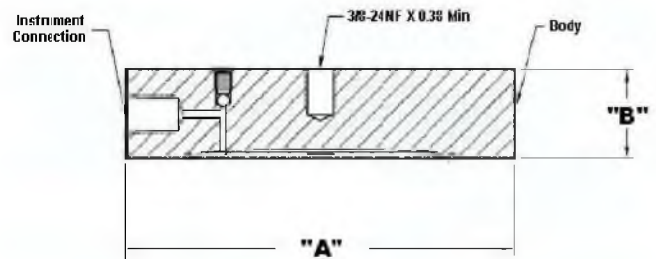


Figure 12— Seal Dimensions (Pancake)

Chemical Tee "Taylor Wedge" Seal

Type	Size	Dimension	3.5" Diaph. (in.)
Chemical Tee "Taylor Wedge" Seal	750 psi	A	5.00
		B	0.50

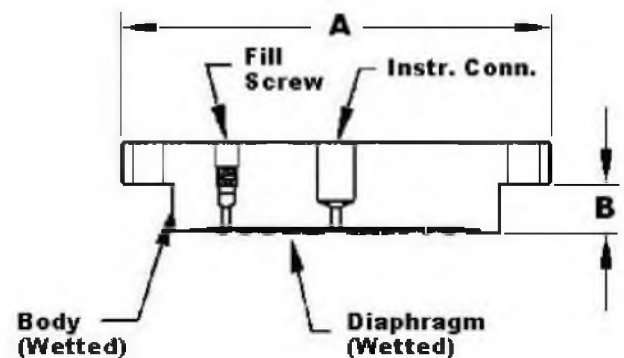


Figure 13— Seal Dimensions (Chemical TEE "Taylor Wedge" Seals)

Seal with Threaded Process Connection

Type	Size	Dimension	2.4" Diaphragm Dia. (in.)	2.9" Diaphragm Dia. (in.)	3.1" Diaphragm Dia. (in.)
Threaded Process Conn. Seal	1/4" or 1/2"	A	3.50	4.00	5.25
		B0	1.88	1.88	1.79
		B1	1.88	1.88	1.79
	3/4" or 1"	A	3.50	4.00	5.25
		B0	1.88	1.88	1.79
		B1	1.88	1.88	1.79
		B2	3.25	2.18	2.14
		B0	Without Flush		
		B1	B Dimension with 1/4 NPT Flushing Connection		
		B2	B dimension with 1/2 NPT Flushing Connection		

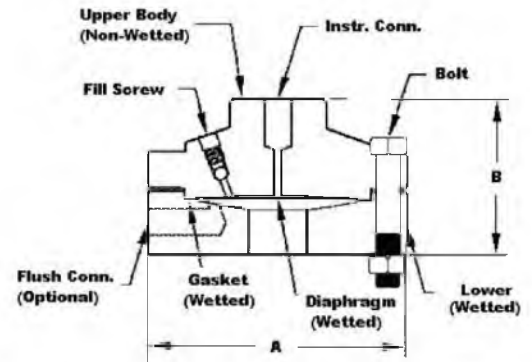


Figure 14— Seal Dimensions (Threaded Process Connection Seals)

Sanitary Seal

Type	Size	Dimension	1.9" Diaphragm Dia. (in.)	2.4" Diaphragm Dia. (in.)	2.9" Diaphragm Dia. (in.)	3.1" Diaphragm Dia. (in.)
Sanitary Seal	2"	A	2.50	-	-	-
		B	1.42	-	-	-
	2- 1/2"	A	-	3.00	-	-
		B	-	1.28	-	-
	3"	A	-	-	3.57	-
		B	-	-	1.38	-
	4"	A	-	-	-	4.68
		B	-	-	-	1.60

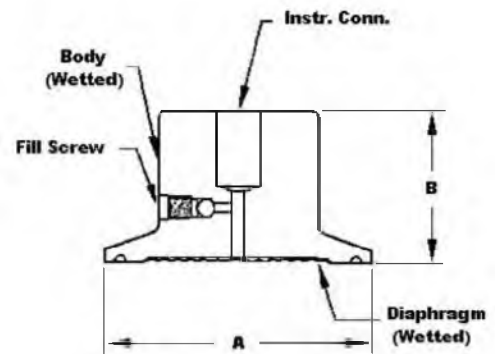


Figure 15- Seal Dimensions (Sanitary Seals)

Saddle Seal

Type	Size	Dimension	2.4" Diaph. (in.)
Saddle Seal	3"	A	3.50
		B	2.90
	4" or larger	A	3.50
		B	3.04

Note: Specify 6 or 8 bolt pattern.

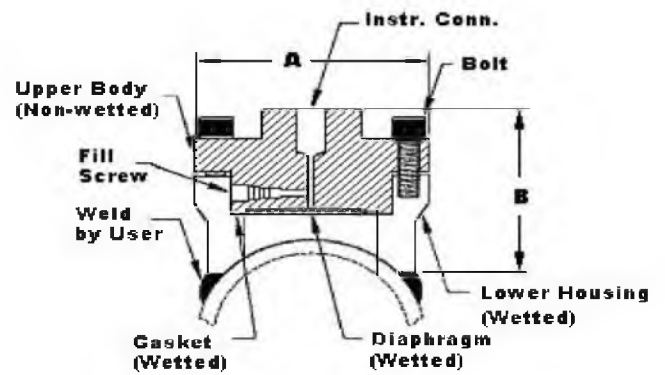


Figure 16 — Seal Dimensions (3" Saddle Seal)

Type	Size	Dimension	2.4" Diaph. (in.)
Saddle Seal	3"	A	3.50
		B	2.90
	4" or larger	A	3.50
		B	3.04

Note: Specify 6 or 8 bolt pattern.

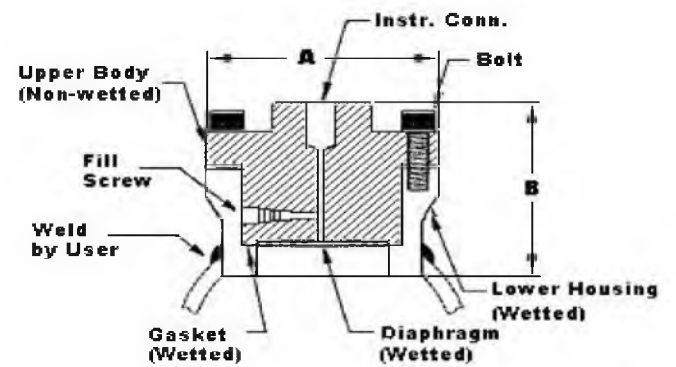


Figure 17— Seal Dimensions (4" Saddle Seal)

Calibration Ring

Type	Size	Rating	Dimension	1/4 NPT	1/2 NPT
Calibration Ring	3"	150# / 500#	A	5.00	5.00
			B	1.00	1.50
			C	3.00	3.00

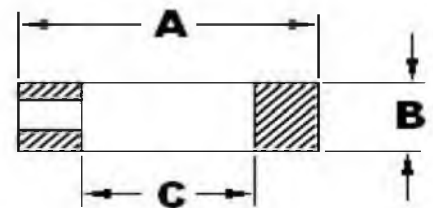


Figure 18— Calibration Ring

Communications Protocols & Diagnostics

HART Protocol

Version:

HART 7

Power Supply

Voltage: 10.8 to 42.4Vdc at terminals

Load: Maximum 1440 ohms See [Figure 2](#)

Minimum Load: 0 ohms. (For handheld communications a minimum load of 250 ohms is required)

Foundation Fieldbus (FF)

Power Supply Requirements

Voltage: 9.0 to 32.0Vdc at terminals

Steady State Current: 17.6mAdc

Software Download Current: 27.4mAdc

Available Function Blocks

Block Type	Qty	Execution Time
Resource	1	n/a
Transducer	1	n/a
Diagnostic	1	n/a
Analog Input	1*	30 ms
PID w/Autotune	1	45 ms
Integrator	1	30 ms
Signal Char (SC)	1	30 ms
LCD Display	1	n/a
Flow Block	1	30 ms
Input Selector	1	30 ms
Arithmetic	1	30 ms

* AI block may have two (2) additional instantiations.

All available function blocks adhere to FOUNDATION Fieldbus standards. PID blocks support ideal & robust PID algorithms with full implementation of Auto-tuning.

Link Active Scheduler

Transmitters can perform as a backup Link Active Scheduler and take over when the host is disconnected. Acting as a LAS, the device ensures scheduled data transfers typically used for the regular, cyclic transfer of control loop data between devices on the Fieldbus.

Number of Devices/Segment

Entity IS model: 6 devices/segment

Schedule Entries

18 maximum schedule entries

Number of VCR's: 24 max

Compliance Testing: Tested according to ITK 6.0.1

Software Download

Utilizes Class-3 of the Common Software Download procedure as per FF-883 which allows the field devices of any manufacturer to receive software upgrades from any host.

Honeywell Digitally Enhanced (DE)

DE is a Honeywell proprietary protocol which provides digital communications between Honeywell DE enabled field devices and Hosts.

Power Supply

Voltage: 10.8 to 42.4Vdc at terminals

Load: Maximum 1440 ohms See [Figure 2](#)

Standard Diagnostics

ST 800 top level diagnostics are reported as either critical or non-critical and readable via the DD/DTM tools or integral display as shown below.

Critical Diagnostics		
HART DD/DTM tools	Advanced Display	Basic Display
Electronic Module DAC Failure	Electronics Module fault	Electronics Module fault
Meter Body NVM Corrupt	Meterbody fault	Meterbody fault
Config Data Corrupt	Electronics Module fault	Electronics Module fault
Electronic Module Diag Failure	Electronics Module fault	Electronics Module fault
Meter Body Critical Failure	Meterbody fault	Meterbody fault
Sensor Comm Timeout	Meterbody Comm fault	Meterbody Comm fault

Non-Critical Diagnostics		
HART DD/DTM tools	Advanced Display	Basic Display
Display Failure	n/a	n/a
Electronic Module Comm Failure	n/a	n/a
Meter Body Excess Correct	Zero Correct (OK or EXCESSIVE) Span Correct (OK or EXCESSIVE)	n/a
Sensor Over Temperature	Meterbody Temp (OK, OVER TEMP)	n/a
Fixed Current Mode	Analog Out mode (Fixed or Normal)	n/a
PV Out of Range	Primary PV (OK or OVERLOAD)	n/a
No Factory Calibration	Factory Cal (OK, NO FACTORY CAL)	n/a
No DAC Compensation	DAC Temp Comp (OK, NO COMPENSATION)	n/a
LRV Set Error – Zero Config Button	n/a	n/a
URV Set Error – Span Config Button	n/a	n/a
AO Out of Range	n/a	n/a
Loop Current Noise	n/a	n/a
Meter Body Unreliable Comm	Meterbody Comm (OK, SUSPECT)	n/a
Tamper Alarm	n/a	n/a
No DAC Calibration	n/a	n/a
Sensor Supply Voltage Low	Supply Voltage (OK, LOW, or HIGH)	n/a

Refer to ST 800 diagnostics tech note for additional level diagnostics.

Other Certification Options

Materials

- NACE MRO175, MRO103, ISO15156

Approval Certifications:

AGENCY	TYPE OF PROTECTION	COMM. OPTION	FIELD PARAMETERS	AMBIENT TEMP (Ta)
FM Approvals™	Explosionproof: Class I, Division 1, Groups A, B, C, D; Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; T4 Class I, Zone 0/1, AEx d IIC Ga/Gb T4 Class II, Zone 21, AEx tb IIIC Db T 95°C	All	Note 1	-50 °C to 85°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Class I, Zone 0, AEx ia IIC Ga T4 FISCO Field Device (Only for FF Option) Ex ia IIC T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D locations, Class I, Zone 2, AEx nA IIC Gc T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Enclosure: Type 4X/ IP66/ IP67	All	All	-
	Explosion Proof: Class I, Division 1, Groups A, B, C, D; Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; T4 Ex d IIC Ga T4 Ex tb IIIC Db T 95°C	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Ex ia IIC Ga T4 FISCO Field Device (Only for FF Option) Ex ia IIC T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
Canadian Standards Association (CSA)	Nonincendive: Class I, Division 2, Groups A, B, C, D; T4 Ex nA IIC Gc T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Enclosure: Type 4X/ IP66/ IP67	All	All	-
	Explosion Proof: Class I, Division 1, Groups A, B, C, D; Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; T4 Ex d IIC Ga T4 Ex tb IIIC Db T 95°C	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G; T4 Ex ia IIC Ga T4 FISCO Field Device (Only for FF Option) Ex ia IIC T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C

Approval Certifications: (Continued)

ATEX	Flameproof: II 1/2 G Ex d IIC Ga/Gb T4 II 2 D Ex tb IIIC Db T 95°C	All	Note 1	-50 °C to 85°C
	Intrinsically Safe: II 1 G Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Nonincendive: II 3 G Ex nA IIC Gc T4	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Enclosure: IP66/ IP67	All	All	-
IECEX (World)	Flameproof : Ex d IIC Ga/Gb T4 Ex tb IIIC Db T 95°C	All	Note 1	-50 °C to 85°C
	Intrinsically Safe: Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Nonincendive: Ex nA IIC Gc T4	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Enclosure: IP66/ IP67	All	All	-
SAEx (South Africa)	Flameproof : Ex d IIC Ga/Gb T4 Ex tb IIIC Db T 95°C	All	Note 1	-50 °C to 85°C
	Intrinsically Safe: Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Nonincendive: Ex nA IIC Gc T4	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Enclosure: IP66/ IP67	All	All	-
INMETRO (Brazil)	Flameproof: Ex d IIC Ga/ Gb T4 Ex tb IIIC Db T 95°C	All	Note 1	T5 Ta = -50 to 93°C
	Intrinsically Safe: Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	T4 Ta = -50 to 93°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	T4 Ta = -50 to 70°C
	Nonincendive: Ex nA IIC Gc T4	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Enclosure : IP 66/67	All	All	-

Approval Certifications: (Continued)

NEPSI (China)	Flameproof: Ex d IIC Ga/Gb T4 Ex tb IIIC Db T 85°C	All	Note 1	T5 Ta = -50 to 93°C
	Intrinsically Safe: Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Nonincendive: Ex nA IIC Gc T4	4-20 mA / DE/ HART/ Foundation Fieldbus	Note 1	-50 °C to 85°C
	Enclosure : IP 66/67	All	All	-
GOST	Flameproof: 1 Ex d IIC Ga/Gb T4 Ex tb IIIC Db T 85°C	All	Note 1	-50 °C to 85°C
	Intrinsically Safe: 0 Ex ia IIC Ga T4	4-20 mA / DE/ HART	Note 2a	-50 °C to 70°C
	FISCO Field Device (Only for FF Option) Ex ia IIC T4	Foundation Fieldbus	Note 2b	-50 °C to 70°C
	Enclosure : IP 66/67	All	All	

Notes:

1. Operating Parameters:

Voltage= 11 to 42 V DC Current= 4-20 mA Normal
= 10 to 30 V (FF) = 30 mA (FF)

2. Intrinsically Safe Entity Parameters

a. Analog/ DE/ HART Entity Values:

Vmax= Ui = 30V Imax= li= 105mA Ci = 4.2nF Li =984 uH Pi =0.9W

Transmitter with Terminal Block Revision E or Later)

Vmax= Ui = 30V Imax= li= 225mA Ci = 4.2nF Li = 0 Pi =0.9W

Note : Transmitter with Terminal Block Revision E or later

The revision is on the label that is on the module. There will be two lines of text on the label:

- First is the Module Part #: 50049839-001 or 50049839-002
- Second line has the supplier information, along with the REVISION:
XXXXXX-EXXXX, THE "X" is production related, THE POSITION of the "E" IS THE REVISION.

b. Foundation Fieldbus- Entity Values

Vmax= Ui = 30V Imax= li= 180mA Ci = 0nF Li = 984 uH Pi =1W

Transmitter with Terminal Block Revision F or Later)

Vmax= Ui = 30V Imax= li= 225mA Ci =0nF Li = 0 Pi =1 W

FISCO Field Device Imax= li= 380 mA Ci = 0nF Li = 0 Pi =5.32 W

Vmax= Ui = 17.5V

Note : Transmitter with Terminal Block Revision F or later

The revision is on the label that is on the module. There will be two lines of text on the label:

- First is the Module Part #: 50049839-003 or 50049839-004
- Second line has the supplier information, along with the REVISION:
XXXXXX-EXXXX, THE "X" is production related, THE POSITION of the "E" IS THE REVISION.

Approval Certifications: (Continued)

Marine Certificates	<p>This certificate defines the certifications covered for the ST 800 Pressure Transmitter family of products, including the SMV 800 Smart Multivariable Transmitter. It represents the compilation of the five certificates Honeywell currently has covering the certification of these products into marine applications.</p> <p>For ST 800 Smart Pressure Transmitter and SMV800 Smart Multivariable Transmitter</p>																
	<p>American Bureau of Shipping (ABS) - 2009 Steel Vessel Rules 1-1-4/3.7, 4-6-2/5.15, 4-8-3/13 & 13.5, 4-8-4/27.5.1, 4-9-7/13. Certificate number: 04-HS417416-PDA</p>																
	<p>Bureau Veritas (BV) - Product Code: 389:1H. Certificate number: 12660/B0 BV</p>																
	<p>Det Norske Veritas (DNV) - Location Classes: Temperature D, Humidity B, Vibration A, EMC B, Enclosure C. For salt spray exposure; enclosure of 316 SST or 2-part epoxy protection with 316 SST bolts to be applied. Certificate number: A-11476</p>																
	<p>Korean Register of Shipping (KR) - Certificate number: LOX17743-AE001</p>																
	<p>Lloyd's Register (LR) - Certificate number: 02/60001(E1) & (E2)</p>																
SIL 2/3 Certification	<p>IEC 61508 SIL 2 for non-redundant use and SIL 3 for redundant use according to EXIDA and TÜV Nord Sys Tec GmbH & Co. KG under the following standards: IEC61508-1: 2010; IEC 61508-2: 2010; IEC61508-3: 2010.</p>																
MEASUREMENT INSTRUMENTS DIRECTIVE (MID) 2004/ 22/ EC	<p>Certificate Issued by NMI Certin B.V. Mechanical Class: M3 Electromagnetic Environment: E3 Ambient Temperature Range: -25 °C to + 55 °C</p> <table border="1" data-bbox="500 1146 1205 1400"> <thead> <tr> <th>Unit</th> <th>Custom Calibration</th> </tr> </thead> <tbody> <tr> <td>STD820</td> <td>0 to 1000 mBar</td> </tr> <tr> <td>STD830</td> <td>0 to 7 Bar</td> </tr> <tr> <td>STA84L</td> <td>0 to 35 Bar A</td> </tr> <tr> <td>STG84L</td> <td>0 to 35 Bar</td> </tr> <tr> <td>STD870</td> <td>0 to 100 Bar</td> </tr> <tr> <td>STA87L</td> <td>0 to 100 Bar A</td> </tr> <tr> <td>STG87L</td> <td>0 to 100 Bar</td> </tr> </tbody> </table>	Unit	Custom Calibration	STD820	0 to 1000 mBar	STD830	0 to 7 Bar	STA84L	0 to 35 Bar A	STG84L	0 to 35 Bar	STD870	0 to 100 Bar	STA87L	0 to 100 Bar A	STG87L	0 to 100 Bar
Unit	Custom Calibration																
STD820	0 to 1000 mBar																
STD830	0 to 7 Bar																
STA84L	0 to 35 Bar A																
STG84L	0 to 35 Bar																
STD870	0 to 100 Bar																
STA87L	0 to 100 Bar A																
STG87L	0 to 100 Bar																

Application Data

Liquid Level: Closed Tank

Determine the minimum and maximum pressure differentials to be measured (Figure 19).

$$\begin{aligned} P_{\text{Min}} &= (SG_p \times a) - (SG_f \times d) \\ &= \text{LRV when HP at bottom of tank} \\ &= -\text{URV when LP at bottom of tank} \end{aligned}$$

$$\begin{aligned} P_{\text{Max}} &= (SG_p \times b) - (SG_f \times d) \\ &= \text{URV when HP at bottom of tank} \\ &= -\text{LRV when LP at bottom of tank} \end{aligned}$$

Where:

minimum level at 4mA
maximum level at 20 mA




a = distance between bottom tap and minimum level

b = distance between bottom tap and maximum level

d = distance between taps

SG_f = Specific Gravity of capillary fill fluid (See Page 6 "Material Specifications" for values.)

SG_p = Specific Gravity of process fluid

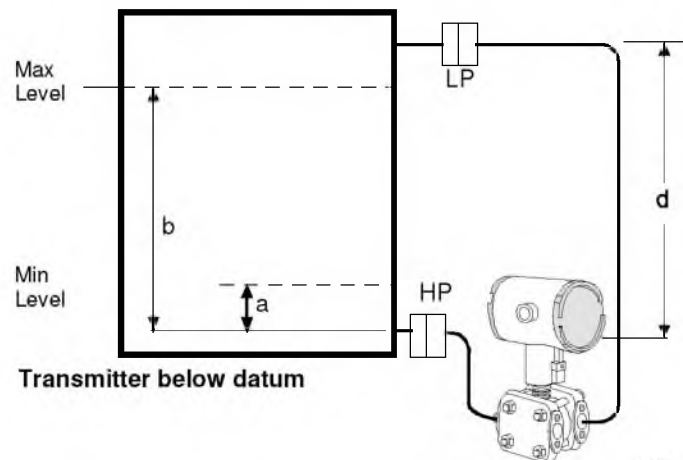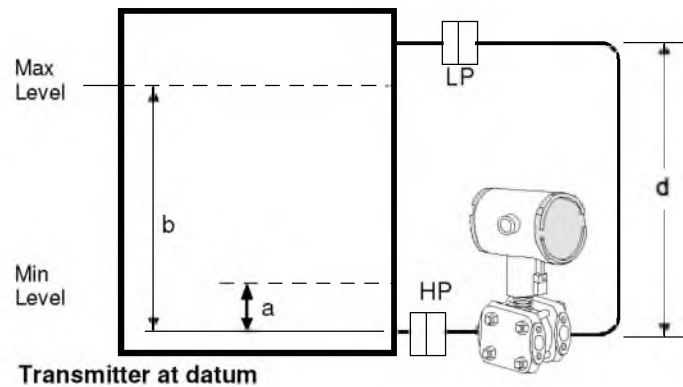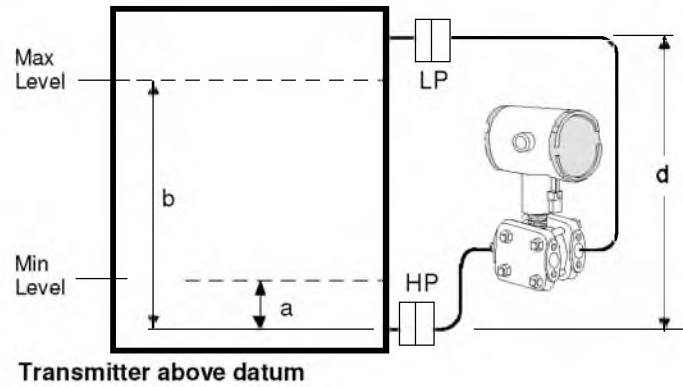

24253

Figure 19—Closed tank liquid level measurement distance

Application Data (Cont'd)

Density or Interface*

Calculate the minimum and maximum pressure differentials to be measured (Figure 20).

$P_{\min} = (SG_{\min} - SG_f) \times (d)$;
minimum density, 4mA output

$P_{\max} = (SG_{\max} - SG_f) \times (d)$;
maximum density, 20mA output

Where:

d = distance between the taps

SG_{\max} = maximum Specific Gravity

SG_{\min} = minimum Specific Gravity

SG_f = Specific Gravity of capillary fill fluid (See Page 6 "Material Specifications" for values.)

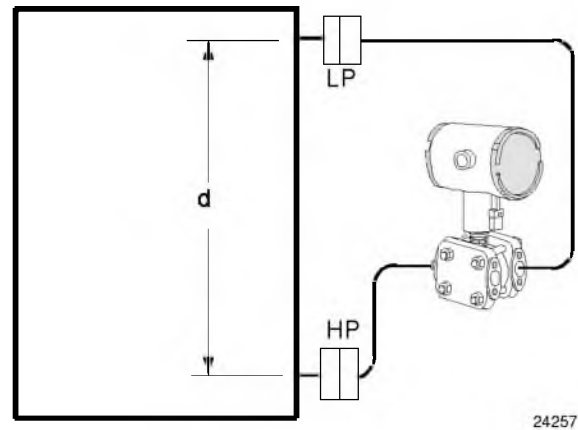


Figure 20—Density, direct acting transmitter configuration

Seal Configurations



Figure 21—Flush Flange Seals

Flush Flange Seals can be used with differential, gauge and absolute pressure transmitters and are available with 3" ANSI Class 150, ANSI Class 300 and DIN DN80-PN40 process connections. Flush flange seals can also be provided with Lowers. Lowers are essentially calibration rings, which allow flushing connections if needed.



Figure 23—Pancake Seals

Pancake Seals can be used with differential, gauge and absolute pressure transmitters and are available with 3" ANSI Class 150, 300 and 600 process connections.



Figure 22— Flange Seal with Extended Diaphragm

Flange Seal with Extended Diaphragm can be used with differential, gauge and absolute pressure transmitters and are available with 3" and 4" ANSI Class 150, ANSI Class 300, DIN DN80-PN40 and DIN DN100-PN40 process connections. 2", 4" and 6" extension lengths are available



Figure 24— Chemical Tee "Taylor" Wedge

Chemical Tee "Taylor" Wedge can be used with differential pressure transmitters and are available with Taylor Wedge 5" O.D. process connection.

Seal Configurations (cont'd)



Figure 25— Seals with Threaded Process Connections

Seals with Threaded Process Connections can be used with differential, gauge and absolute pressure transmitters and are available with 1/2", 3/4" and 1" NPT Female process connections.



Figure 29— Stainless Steel Armor and PVC Coated Stainless Steel Armor Capillaries

Stainless Steel Armor and PVC Coated Stainless Steel Armor Capillaries are available with Honeywell Remote Seal Solutions.



Figure 26— Sanitary Seals

Sanitary Seals can be used with differential, gauge and absolute pressure transmitters and are available with 3" and 4" Tri-Clover-Tri-Clamp process connections.



Figure 30— 2" Stainless Steel Nipples

2" Stainless Steel Nipples are available for Close-Coupled remote seal solutions



Figure 27— Saddle Seals

Saddle Seals can be used with differential, gauge and absolute pressure transmitters and are available with 3" and 4" (6 bolt or 8 bolt designs) process connections.



Figure 31— Welded Meter Body for All-Welded Remote Seal Solution

Welded Meter Body for All-Welded Remote Seal Solution. The welded ST 800 meter body is an important part of an All-Welded Remote Seal Solution, which is commonly used in Vacuum applications.



Figure 28— Calibration Rings

Calibration Rings are available with Flush Flange Seals and Pancake Seals. Flushing ports (1/4" or 1/2") are available with calibration rings.

Model Selection Guide

Model Selection Guides are subject to change and are inserted into the specifications as guidance only. Prior to specifying or ordering a model check for the latest revision Model Selection Guides which are published at:

Model STR800 (DP, GP & AP) Remote Seals



Model Selection Guide
34-ST-16-88 Issue 5

Instructions

- Select the desired Key Number. The arrow to the right marks the selection available.
- Make selections from each Table (I, II and IX) using the column below the proper arrow.
- A (●) denotes unrestricted availability. A letter denotes restricted availability.
- Restrictions follow Table IX.

Key Number	I	II	III	IV	V	VI	VII	VIII
STR ___								

KEY NUMBER	URL	LRL	Max Span	Min Span	Units	Selection	Availability
Measurement Range Std Accuracy	400 (1000)	-400 (-1000)	400 (1000)	4 (10)	" H ₂ O (mbar)	STR82D	↓
	100 (7)	-100 (-7)	100 (7)	1 (0.07)	psi (bar)	STR83D	↓
	500 (35)	5.7 (0.39)	500 (35)	5 (0.35)	psia (bar A)	STR84A	↓
	500 (35)	-9 (-0.62)	500 (35)	5 (0.35)	psi (bar)	STR84G	↓
	3000 (210)	-9 (-0.62)	3000 (210)	30 (2.1)	psi (bar)	STR87G	↓

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

TABLE I	Description	Selection	Availability			
Meter Body & Capillaries	a. Number of Seals	1 Remote Seal (High Side) 2 Remote Seals 1 Remote Seal (Low Side)	1 2 3	● ● ●		
	b. Primary Fill Fluid	Silicone Oil 200 Fluorinated Oil CTFE	1 2	● ●		
	c. Construction	Non-Wetted Adapter Head Materials				
	In-Line Gauge/ Absolute	316 SS Bonnet 316 SS Bonnet for Close-Couple	A B	● ●		
	Dual Head DP	316 SS (bolt-on heads) 316 SS for Close-Couple 316 SS with all-welded meter body	C D E	● 3 4		
	d. Bolts and Nuts for Transmitter Heads	None Carbon Steel Bolts and Nuts 316 SS Bolts and Nuts A286 SS (NACE) Bolts and 304 SS (NACE) Nuts B7M (NACE) Bolts and 7M (NACE) Nuts	0 C S N B	22 ● ● ● ●		
	e. Secondary Fill Fluid (capillary & seal)	No Fill Fluid Silicone Oil 200 Fluorinated Oil CTFE Silicone Oil 704 Neobee [®] M20 ¹¹ Syltherm [®] 800 ¹²	0 1 2 3 4 5	5 ● ● ● ● ●		
	f. Connection of Remote Seal to Meter Body	No Capillary, No Nipple (Specify for VAM Unit Only)		0	5 5	
		Capillary Length	SS Armor	5 feet 1.5 m	A	●
				10 feet 3.0 m	B	●
				15 feet 4.5 m	C	●
				20 feet 6.1 m	D	●
				25 feet 7.5 m	E	●
				35 feet 10.7 m	F	●
		Capillary Length	PVC Coated SS Armor	5 feet 1.5 m	G	●
10 feet 3.0 m				H	●	
15 feet 4.5 m				J	●	
20 feet 6.1 m	K			●		
Capillary Length	PVC Coated SS Armor	25 feet 7.5 m	L	●		
		35 feet 10.7 m	M	●		
		2 inch long SS nipple close-coupled	2	6 6		
g. Seal Option	None Std Gold Plated Seal Diaph. = 50 µin Teflon Coated Seal Diaphragm - only for anti-sticking	0 1 4	● 7 7 7			

¹¹ Limited vacuum availability.

¹² Minimum static pressure requirement. No vacuum allowed. See Specifications 34-ST-03-88 Figure 15



STR84G & 87G & 84A
STR82D & 83D

Note: When selecting required seal, you must specify only the 9 selections within the required seal type.






TABLE II		Description				Selection			
Seals  	No Seal Attached to Core Transmitter (Specify for VAM Unit Only)				0 0 0 0 0 0 0 0	21	21		
	Seal Type	Diaphragm Diameter	Flange Size	Flange Pressure Rating ¹	Selection				
	 Flush Flanged Seal	3.5"	3"	ANSI Class 150	AFA _____	•	•		
				ANSI Class 300	AFC _____	•	•		
			80mm	DIN DN80-PN40	AFM _____	•	•		
		Wetted Material 			Diaphragm	Upper Insert	Selection		
					316L SS	316L SS	___ AA ___	•	•
					Hastelloy [®] C-276	316L SS	___ AB ___	•	•
					Hastelloy [®] C-276	Hastelloy [®] C-276	___ AC ___	•	•
					Monel 400 [®]	Monel 400 [®]	___ AE ___	8	8
				Tantalum ⁵	316L SS	___ AF ___	8	8	
		Non-Wetted Material (upper)		CS (Nickel Plated) 316L SS		___ 1 ___	•	•	
	Seal-Capillary Connection		Center Seal Side Seal		___ 1 ___ ___ 2 ___	•	•		
	Calibration Rings 		None 316L SS Hastelloy [®] C-276 Monel 400 [®]		___ A ___ ___ B ___ ___ C ___ ___ D ___	•	•		
	Flushing Connections and Plugs ⁴ (Metal plug material will be the same as Cal. ring material if metal plug is chosen)		None One 1/4" with plastic plug One 1/4" with metal plug Two 1/4" with plastic plugs Two 1/4" with metal plugs One 1/2" with plastic plug One 1/2" with metal plug Two 1/2" with plastic plugs Two 1/2" with metal plugs		___ 0 ___ ___ H ___ ___ J ___ ___ M ___ ___ N ___ ___ P ___ ___ Q ___ ___ R ___ ___ S ___	•	•		

Table II continued next page

¹ Standard facing 125-250 AARH RF (raised face) serrated surface finish.

⁴ Plastic Plugs are TEMPORARY ONLY to protect threads and MUST be REMOVED before installation

⁵ Tantalum Upper insert has Tantalum wetted parts and 316 SS or CS non-wetted parts

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

STR84G & 87G & 84A
STR82D & 83D


TABLE II		Description				Selection			
Seal Type	Diaphragm Diameter	Flange Size	Flange Pressure Rating ¹	Const. - See Spec. Figure 34-ST-03-88	Construction - See Spec. Figure 34-ST-03-88				
Seals (continued)  Flush Flanged Seal with Lower	2.4"	1"	ANSI 150	22	BCA _____	12	•		
			ANSI 300	22	BCC _____	12	•		
		1-1/2"	ANSI 150	22	BGA _____	12	•		
			ANSI 300	22	BGC _____	12	•		
		2"	ANSI 150	22	BDA _____	12	•		
			ANSI 300	22	BDC _____	12	•		
		3"	ANSI 150	22	BFA _____	12	•		
			ANSI 300	22	BFC _____	12	•		
		2.9"	1/2"	ANSI 150	23	CAA _____	•	•	
			1"	ANSI 150	23	CCA _____	•	•	
				ANSI 300	23	CCC _____	•	•	
			1-1/2"	ANSI 150	22	CGA _____	•	•	
			ANSI 300	22	CGC _____	•	•		
		2"	ANSI 150	22	CDA _____	•	•		
			ANSI 300	22	CDC _____	•	•		
		4.1"	1/2"	ANSI 150	22	DAA _____	•	•	
			1"	ANSI 150	23	DCA _____	•	•	
				ANSI 300	23	DCC _____	•	•	
			1-1/2"	ANSI 150	23	DGA _____	•	•	
				ANSI 300	23	DGC _____	•	•	
	2"	ANSI 150	23	DDA _____	•	•			
		ANSI 300	22	DDC _____	•	•			
	3"	ANSI 150	22	DFA _____	•	•			
		ANSI 300	22	DFC _____	•	•			
	Wetted Material			Diaphragm	Lower	Selection			
				316L SS	316L SS	--- BA ---	•	•	
				Hastelloy® C-276	316L SS	--- BB ---	•	•	
				Hastelloy® C-276	Hastelloy® C-276	--- BC ---	•	•	
				Monel 400®	Monel 400®	--- BE ---	8	8	
				Tantalum	316L SS	--- BF ---	8	8	
		Tantalum	Hastelloy® C-276	--- BG ---	8	8			
		Tantalum	Tantalum Clad	--- BH ---	13	13			
Non-Wetted Material (upper, upper insert)			Upper	Upper Insert	Selection				
			316L SS	316L SS	----- 4 -----	•	•		
		Carbon Steel	316L SS	----- 5 -----	•	•			
Bolts ⁶		No Selection			----- 0 -----	•	•		
Flushing		None			----- 0 -----	•	•		
Connections and Plugs ⁴ (Metal plug material will be the same as Lower material, if metal plug is chosen - (SS Plug for CS Lower and Tantalum Clad)		One 1/4" with plastic plug			----- H -----	•	•		
		One 1/4" with metal plug			----- J -----	•	•		
		Two 1/4" with plastic plugs			----- M -----	•	•		
		Two 1/4" with metal plugs			----- N -----	•	•		
		One 1/2" with plastic plug			----- P -----	•	•		
		One 1/2" with metal plug			----- Q -----	•	•		
Gasket		Two 1/2" with plastic plugs			----- R -----	•	•		
		Two 1/2" with metal plugs			----- S -----	•	•		
		Klinger® C-4401 (non-asbestos)			----- K -----	•	•		
		Grafoil®			----- G -----	•	•		
Teflon®			----- T -----	•	•				
Gylon® 3510			----- L -----	15	15				

Table II continued next page

¹ Standard facing 125-250 AARH RF (raised face) serrated surface finish.

⁶ Bolt material will be same as Upper Material. However, if Table I bolts/nuts material is NACE or B7M, seal bolt material will be 304 SS NACE.

⁴ Plastic Plugs are TEMPORARY ONLY to protect threads and MUST be REMOVED before installation

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

STR84G & 87G & 84A
STR82D & 83D


TABLE II		Description				Selection	
Seal Type	Diaphragm Diameter	Flange Size	Flange Pressure Rating ¹		Selection		
 <p>Flange Seal with Extended Diaphragm</p>	2.8"	3" (2.8" OD extension)	ANSI Class 150		EFA _____	• •	
			ANSI Class 300		EFC _____	• •	
	DIN DN80-PN40		EFM _____	• •			
	3.5"	4" (3.70" OD extension)	ANSI Class 150		FGA _____	• •	
			ANSI Class 300		FGC _____	• •	
	DIN DN100-PN40		FGP _____	• •			
	Wetted Material		Diaphragm	Ext. Tube	Selection		
			316L SS	316L SS	___ EA ___	• •	
			Hastelloy [®] C-276	316L SS	___ EB ___	• •	
			Hastelloy [®] C-276	Hastelloy [®] C-276	___ EC ___	• •	
Non-Wetted Material (flange)		CS (Nickel Plated)		___ 7 ___	• •		
		316L SS		___ 8 ___	• •		
Bolts		No Selection		___ 0 ___	• •		
Extension Length		2"		___ 2 ___	• •		
		4"		___ 4 ___	• •		
		6"		___ 6 ___	• •		
No Selection	No Selection	No Selection		___ 0 ___	• •		

Table II continued below

STR84G & 87G & 84A
STR82D & 83D


TABLE II		Description				Selection	
Seal Type	Diaphragm Diameter	Flange Size	Flange Pressure Rating Dependent on Customer Flange ¹		Selection		
 <p>Pancake Seal</p>	3.5"	3"	ANSI Class 150/300/600		GFA _____	• •	
					Diaphragm	Body	
	Wetted Material		316L SS	316L SS	___ GA ___	• •	
			Hastelloy [®] C-276	316L SS	___ GB ___	• •	
			Hastelloy [®] C-276	Hastelloy [®] C-276	___ GC ___	• •	
			Monel 400 [®]	Monel 400 [®]	___ GE ___	8 8	
			Tantalum	Tantalum ⁷	___ GG ___	8 8	
	Non-Wetted Material		No Selection		___ 0 ___	• •	
	Bolts		No Selection		___ 0 ___	• •	
	Calibration Rings		None		___ A ___	• •	
		316L SS		___ B ___	10 10		
		Hastelloy [®] C-276		___ C ___	10 10		
		Monel 400 [®]		___ D ___	10 10		
Flushing Connections and Plugs ⁴		None		___ 0 ___	• •		
		One 1/4" with plastic plug		___ H ___	11 11		
		One 1/4" with metal plug		___ J ___	11 11		
		Two 1/4" with plastic plugs		___ M ___	11 11		
		Two 1/4" with metal plugs		___ N ___	11 11		
		One 1/2" with plastic plug		___ P ___	11 11		
		One 1/2" with metal plug		___ Q ___	11 11		
		Two 1/2" with plastic plugs		___ R ___	11 11		
		Two 1/2" with metal plugs		___ S ___	11 11		

Table II continued next page

¹ Standard facing 125-250 AARH RF (raised face) serrated surface finish.

⁴ Plastic Plugs are TEMPORARY ONLY to protect threads and MUST be REMOVED before installation

⁷ Tantalum Body has Tantalum wetted parts and 316 SS non-wetted parts

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

STR84G & 87G & 84A
STR82D & 83D


TABLE II	Description							
	Seal Type	Diaphragm Diameter	Flange Size	Flange Pressure Rating ¹		Selection		
Seals (continued)	 Chemical Tee "Taylor" Wedge	3.5"	Taylor Wedge 5" O.D.	750 psi		HMO _____	16	
		Wetted Material		Diaphragm	Body	Selection		
				316L SS	316L SS	HA _____	•	
				Hastelloy [®] C-276	316L SS	HB _____	•	
				Hastelloy [®] C-276	Hastelloy [®] C-276	HC _____	•	
		Non-Wetted Material		No Selection		0	•	
		Bolts		No Selection		0	•	
Styles		No Selection		0	•			
No Selection		No Selection		0	•			

Table II continued below

STR84G & 87G & 84A
STR82D & 83D


TABLE II	Description								
	Seal Type	Diaphragm Diameter	Threaded Process Connection Size (NPT Female)	Pressure Rating		Selection			
				CS Bolts	304 SS Bolts				
Seals (continued)	 Seal with Threaded Process Connection	2.4"	1/2 NPT	2,500 psi	1,250 psi	JJG _____	12	•	
			3/4 NPT			JKG _____	12	•	
			1 NPT			JLG _____	12	•	
		2.9"	1/2 NPT	2,500 psi	1,250 psi	KJG _____	•	•	
			3/4 NPT			KKG _____	•	•	
			1 NPT			KLK _____	•	•	
		4.1"	1/2 NPT	1,500 psi	750 psi	LJG _____	•	•	
			3/4 NPT			LKG _____	•	•	
			1 NPT			LLG _____	•	•	
		Wetted Material		Diaphragm	Lower	Selection			
				316L SS	Carbon Steel	JA _____	•	•	
				316L SS	316L SS	JB _____	•	•	
				Hastelloy [®] C-276	316L SS	JC _____	•	•	
				Hastelloy [®] C-276	Hastelloy [®] C-276	JD _____	•	•	
				Monel 400 [®]	Monel 400 [®]	JE _____	8	8	
				Tantalum	316L SS	JF _____	8	8	
				Tantalum	Hastelloy [®] C-276	JG _____	8	8	
		Non-Wetted Material (upper)		CS (Nickel Plated)		A _____	•	•	
				316 Stainless Steel		C _____	17	17	
		Bolts ⁸		Carbon Steel		C _____	•	•	
		304 SS		D _____	•	•			
Flushing Connections and Plugs ⁴		None		0	•	•			
		One 1/4" with plastic plug		H _____	•	•			
		One 1/4" with metal plug		J _____	•	•			
		Two 1/4" with plastic plugs		M _____	•	•			
		Two 1/4" with metal plugs		N _____	•	•			
		One 1/2" with plastic plug		P _____	18	18			
		One 1/2" with metal plug		Q _____	18	18			
		Two 1/2" with plastic plugs		R _____	18	18			
		Two 1/2" with metal plugs		S _____	18	18			
Gasket		Klinger [®] C-4401 (non-asbestos)		K _____	•	•			
		Grafoil [®]		G _____	•	•			
		Teflon [®]		T _____	•	•			
		Gylon [®] 3510		L _____	15	15			

Table II continued next page

¹ Standard facing 125-250 AARH RF (raised face) serrated surface finish.

⁴ Plastic Plugs are TEMPORARY ONLY to protect threads and MUST be REMOVED before installation

⁸ If Table I Bolts and Nuts material option is NACE, Bolts and Nuts will ship with Alloy Steel NACE and MAWP may change.

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

STR84G & 87G & 84A
STR82D & 83D



TABLE II		Description							
Seals (continued)	Seal Type	Diaphragm Diameter	Flange Size	Pressure Rating		Selection			
			1.9"	2"	Customer clamp rating or 600 psi, whichever is less		MD0 _____		19
			2.4"	2-1/2"			NE0 _____	20	19
			2.9"	3"			PF0 _____	19	19
			4.1"	4"			QG0 _____	19	19
		Wetted Material	Diaphragm		Body	Selection			
			316L SS		316L SS	___ N A ___	•	•	
		Non-Wetted Material	No Selection		_____ 0 _____		•	•	
		Bolts	No Selection		_____ 0 _____		•	•	
		Styles	Tri-Clover Tri-Clamp®		_____ 8 _____		•	•	
	Gasket	No Selection		_____ 0 _____		•	•		

Table II continued below

STR84G & 87G & 84A
STR82D & 83D

TABLE II		Description							
Seals (continued)	Seal Type	Diaphragm Diameter	Size and Bolt Pattern	Seal Pressure Rating		Selection			
				C.S. Bolts	316 SS Bolts				
			2.4"	for 3" Pipe ≥ 4" pipe	2,500 psi	1,250 psi	RFK _____	12	•
			8-Bolt Design				RGK _____	12	•
			2.4"	for 3" Pipe ≥ 4" pipe	2,000 psi	1,000 psi	RPK _____	12	•
			6-Bolt Design				RQK _____	12	•
			Wetted Material	Diaphragm	Lower Housing	Selection			
				316L SS	Carbon Steel	___ RA ___	•	•	
				316L SS	316L SS	___ RB ___	•	•	
				Hastelloy® C-276	316L SS	___ RC ___	•	•	
			Hastelloy® C-276	Hastelloy® C-276	___ RD ___	•	•		
			316L SS	N/A-Body Only ¹⁰	___ SB ___	•	•		
		Hastelloy® C-276	N/A-Body Only ¹⁰	___ SC ___	•	•			
	Non-Wetted Material	Body	Bolts ^{10,11}	Selection					
		Carbon Steel	Carbon Steel	___ B ___	8	8			
		316L SS	316 SS	___ C ___	•	•			
	Bolts	No Selection		_____ 0 _____		•	•		
	Styles	No Selection		_____ 0 _____		•	•		
	Gasket	Klinger® C-4401 (non-asbestos)		_____ K _____		•	•		
		Grafoil®		_____ G _____		•	•		
		Teflon®		_____ T _____		•	•		
		Gylon® 3510		_____ L _____		•	•		

⁹ All sanitary seals have dairy grade 3A approval.

¹⁰ Bolts are not included with "body only" selection.

¹¹ If Table I Bolts and Nuts material option is NACF, seal bolt material will be 304 SS NACF.

Note: Remote seal system pressure rating is body rating or seal rating, whichever is less.

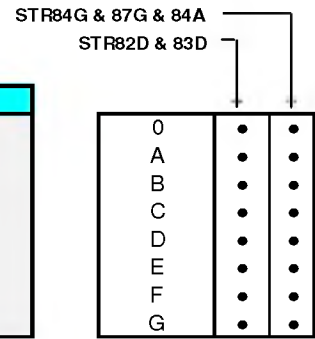


TABLE III	Agency Approvals (see data sheet for Approval Code Details)
Approvals	No Approvals Required
	FM Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof
	CSA Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof
	ATEX Explosion proof, Intrinsically Safe & Non-incendive
	IECEx Explosion proof, Intrinsically Safe & Non-incendive
	SAEx/CCoE Explosion proof, Intrinsically Safe & Non-incendive
	INMETRO Explosion proof, Intrinsically Safe & Non-incendive
	NEPSI Explosion proof, Intrinsically Safe & Non-incendive

TABLE IV	TRANSMITTER ELECTRONIC SELECTIONS		
a. Electronic Housing Material & Connection Type	Material	Connection	Lightning Protection
	Polyester Powder Coated Aluminum	1/2 NPT	None
	Polyester Powder Coated Aluminum	M20	None
	Polyester Powder Coated Aluminum	1/2 NPT	Yes
	Polyester Powder Coated Aluminum	M20	Yes
	316 Stainless Steel (Grade CF8M)	1/2 NPT	None
	316 Stainless Steel (Grade CF8M)	M20	None
	316 Stainless Steel (Grade CF8M)	1/2 NPT	Yes
316 Stainless Steel (Grade CF8M)	M20	Yes	
b. Output/ Protocol	Analog Output		Digital Protocol
	4-20mA dc		HART Protocol
	4-20mA dc none		DE Protocol Foundation Fieldbus
c. Customer Interface Selections	Indicator	Buttons	Languages
	None	None	None
	None	Yes (Zero/Span Only)	None
	Basic	None	English
	Basic	Yes	English
	Advanced	None	EN,GR,IT, FR,SP,RU, TU
	Advanced	Yes	EN,GR,IT, FR,SP,RU, TU
	Advanced	None	EN, CH, JP
Advanced	Yes	EN, CH, JP	






TABLE V	CONFIGURATION SELECTIONS		
a. Application Software	Diagnostics		
	Standard Diagnostics		
b. Output Limit, Failsafe & Write Protect Settings	Write Protect	Fail Mode	High & Low Output Limits ³
	Disabled	High > 21.0mA dc	Honeywell Std (3.8 - 20.8)
	Disabled	Low < 3.6mA dc	Honeywell Std (3.8 - 20.8)
	Enabled	High > 21.0mA dc	Honeywell Std (3.8 - 20.8)
	Enabled	Low < 3.6mA dc	Honeywell Std (3.8 - 20.8)
	Enabled	N/A	N/A Fieldbus or Profibus
c. General Configuration	Factory Standard		
	Custom Configuration (Unit Data Required from customer)		





TABLE VI	CALIBRATION & ACCURACY SELECTIONS		
Accuracy and Calibration	Accuracy	Calibrated Range	Calibration Qty
	NA	None	None
	Standard	Factory Std	Single Calibration
	Standard	Custom (Unit Data Required)	Single Calibration



³ NAMUR Output Limits 3.8 - 20.5mA dc can be configured by the customer or select custom configuration Table Vc

TABLE VII		ACCESSORY SELECTIONS	
a. Mounting Bracket	Bracket Type	Material	
	None	None	
	Angle Bracket	Carbon Steel	
	Angle Bracket	304 SS	
	Angle Bracket	316 SS	
	Marine Approved Angle Bracket	304 SS	
	Flat Bracket	Carbon Steel	
	Flat Bracket	304 SS	
b. Customer Tag	Customer Tag Type		
	No customer tag		
	One Wired Stainless Steel Tag (Up to 4 lines 26 char/line) Two Wired Stainless Steel Tag (Up to 4 lines 26 char/line)		
c. Unassembled Conduit Plugs & Adapters	Unassembled Conduit Plugs & Adapters		
	No Conduit Plugs or Adapters Required		
	1/2 NPT Male to 3/4 NPT Female 316 SS Certified Conduit Adapter		
	1/2 NPT 316 SS Certified Conduit Plug		
	M20 316 SS Certified Conduit Plug		
	Minifast® 4 pin (1/2 NPT) Minifast® 4 pin (M20)		

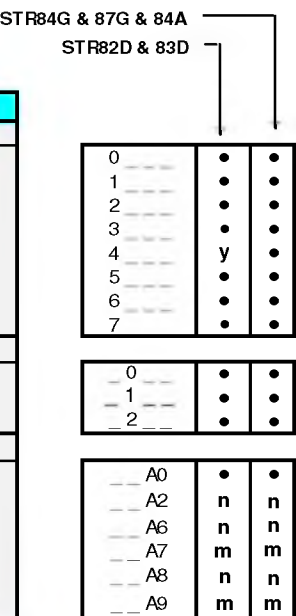


TABLE VIII		OTHER Certifications & Options : (String in sequence comma delimited (XX, XX, XX,...))
Certifications & Warranty	None - No additional options	
	NACE MR0175; MR0103; ISO15156 (FC33338) Process wetted parts only	
	NACE MR0175; MR0103; ISO15156 (FC33339) wetted and non-wetted parts	
	Marine (DNV, ABS, BV, KR, LR) (FC33340)	
	EN10204 Type 3.1 Material Traceability (FC33341)	
	Certificate of Conformance (F3391)	
	Calibration Test Report & Certificate of Conformance (F3399)	
	Certificate of Origin (F0195)	
	FMEDA (SIL 2/3) Certification (FC33337)	
	Over-Pressure Leak Test Certificate (1.5X MAWP) (F3392)	
	Cert Clean for O ₂ or CL ₂ service per ASTM G93	
	Extended Warranty Additional 1 year	
	Extended Warranty Additional 2 years	
	Extended Warranty Additional 3 years	
	Extended Warranty Additional 4 years	
Extended Warranty "Life Time" Additional 15 years		


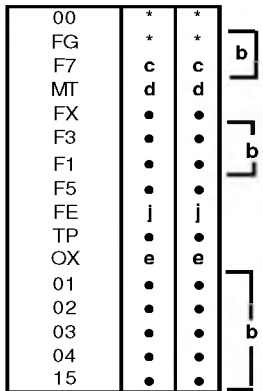


TABLE IX		Manufacturing Specials
Factory	Factory Identification	



MODEL RESTRICTIONS

Restriction Letter	Available Only With		Not Available With	
	Table	Selection(s)	Table	Selection(s)
b	Select only one option from this group			
d			Vila	1,2,3,5,6,7
c	ld	___ 0, N, B ___		
e	lb	___ 2 ___		
f			IVb	F
g			IVb	___ H, D ___
j	IVb	H	Vb	___ 1,2,6 ___
m	IVa	B, D, F, H		
n	IVa	A, C, E, G		
y			lc	___ E ___
2	le	___ 0 ___ ----- ___ 2 ___ ----- ___ 4 ___		
3	lf	___ ___ 2 ___	la	___ 2 ___
4	l	___ 2 ___ 0		
5	VI	___ 0 ___		
6	l	___ B,D ___	VIII	FG, F7, FX, OX, TP, MT, F1
7			la	___ 2 ___
8			II	AF BF BG BH GG JF JG
9	II	___ AA2 ___ ----- ___ AB2 ___		
10			II	___ ___ 0
11			II	___ ___ A
12	lf	___ ___ A, G, 2 ___		
13	II	___ ___ 0 ___	II VIII	___ T ___ FG, F7
15	II	___ BF ___ ----- ___ BG ___ ----- ___ BH ___ ----- ___ JF ___ ----- ___ JG ___		
16	l	___ 2 ___		
17			II	___ JA ___
18			II	JJG JKG JLG
19			la lf	___ 2 ___ ___ 2 ___
20	lf	___ ___ A, G, 2 ___		
21	l	___ ___ 000		
22	lc	___ ___ E ___		

FM ApprovalsSM is a service mark of FM Global
 Hastelloy[®] is a registered trademark of Haynes International
 Monel 400[®] is a registered trademark of Special Metals Corporation.
 HART[®] is a registered trademark of HART Communication Foundation.
 FOUNDATION[™] Fieldbus is a registered trademark of Fieldbus Foundation.
 Teflon[®] is a registered trademark of DuPont.
 Neobee[®] is a registered trademark of Stepan Company.
 Syltherm[®] 800 is a Trademark of Dow Corning Corporation
 Klinger[®] C-4401 is a registered trademark of THERMOSEAL, INC
 GRA FOIL[®] is a registered trademarks of GrafTech International Holdings Inc
 Gylor[®] 3510 is registered trademark of Garlock Sealing Technologies
 Tri-Clover Tri-Clamp[®] is a registered trademark of Alfa-Laval
 DC[®] 200 and DC[®] 704 are registered trademarks of Dow Corning

По вопросам продаж и поддержки обращайтесь:

Астана +7(7172)727-132, Волгоград (844)278-03-48, Воронеж (473)204-51-73, Екатеринбург (343)384-55-89, Казань (843)206-01-48,
Краснодар (861)203-40-90, Красноярск (391)204-63-61, Москва (495)268-04-70, Нижний Новгород (831)429-08-12,
Новосибирск (383)227-86-73, Ростов-на-Дону (863)308-18-15, Самара (846)206-03-16, Санкт-Петербург (812)309-46-40,
Саратов (845)249-38-78, Уфа (347)229-48-12

Единый адрес: hwn@nt-rt.ru

www.honeywell.nt-rt.ru
